

| | |
|---------------|-----------------------|
| Document No. | 853-1496 |
| ECN No. | 00731 |
| Date of Issue | October 17, 1990 |
| Status | Product Specification |
| ACL Products | |

74AC/ACT11286

9-bit odd/even parity generator/ checker with bus drive I/O port

FEATURES

- Generates either odd or even parity for nine data lines
- Word length easily expanded by cascading
- Direct bus connection for parity generation or for checking by using the parity I/O port
- Glitch-free bus during power up/down
- Output capability: $\pm 24\text{mA}$
- CMOS (AC) and TTL (ACT) voltage level inputs
- 50 Ω incident wave switching
- Center-pin V_{CC} and ground configuration to minimize high-speed switching noise
- I_{CC} category: MSI

DESCRIPTION

The 74AC/ACT11286 high-performance CMOS devices combine very high speed and high output drive comparable to the most advanced TTL families.

The 74AC/ACT11286 9-bit parity generator or checker is commonly used to detect errors in high-speed data transmission or data retrieval systems. It features *(continued)*

QUICK REFERENCE DATA

| SYMBOL | PARAMETER | CONDITIONS $T_{amb} = 25^{\circ}\text{C}; \text{GND} = 0\text{V};$ $V_{CC} = 5.0\text{V}$ | | TYPICAL | | UNIT |
|-------------------|--|---|----------|---------|-----|------|
| | | | | AC | ACT | |
| t_{PLH}/t_{PHL} | Propagation delay I_n to PARITY ERROR | $C_L = 50\text{pF}$ | | 5.9 | 7.3 | ns |
| C_{PD} | Power dissipation capacitance ¹ | $f = 1\text{MHz};$ $C_L = 50\text{pF}$ | Enabled | 53 | 56 | pF |
| | | | Disabled | 46 | 50 | |
| C_{IN} | Input capacitance | $V_I = 0\text{V}$ or V_{CC} | | 3.5 | 3.5 | pF |
| $C_{I/O}$ | I/O capacitance | $V_{I/O} = 0\text{V}$ or V_{CC} ; Disabled | | 8.5 | 8.5 | pF |
| I_{LATCH} | Latch-up current | Per Jeduc JC40.2 Standard 17 | | 500 | 500 | mA |

Note:

1. C_{PD} is used to determine the dynamic power dissipation (P_D in μW):


$$P_D = C_{PD} \times V_{CC}^2 \times f_I + \sum (C_L \times V_{CC}^2 \times f_O)$$

where:
 f_I = input frequency in MHz, C_L = output load capacitance in pF,
 f_O = output frequency in MHz, V_{CC} = supply voltage in V,
 $\sum (C_L \times V_{CC}^2 \times f_O)$ = sum of outputs


ORDERING INFORMATION

| PACKAGES | TEMPERATURE RANGE | ORDER CODE |
|-------------------------------------|-------------------|---------------------------|
| 14-pin plastic DIP (300mil-wide) | -40°C to +85°C | 74AC11286N 74ACT11286N |
| 14-pin plastic SO (150mil-wide) | -40°C to +85°C | 74AC11286D 74ACT11286D |


PIN CONFIGURATION

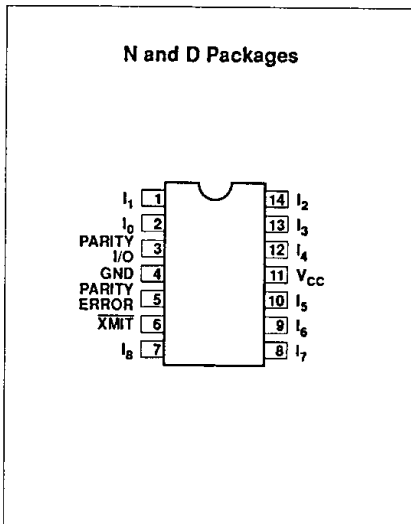

LOGIC SYMBOL

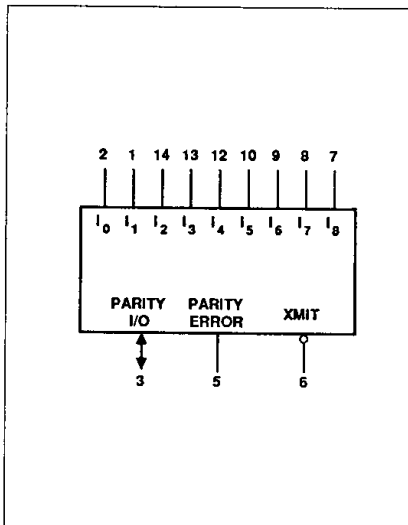

LOGIC SYMBOL (IEEE/IEC)

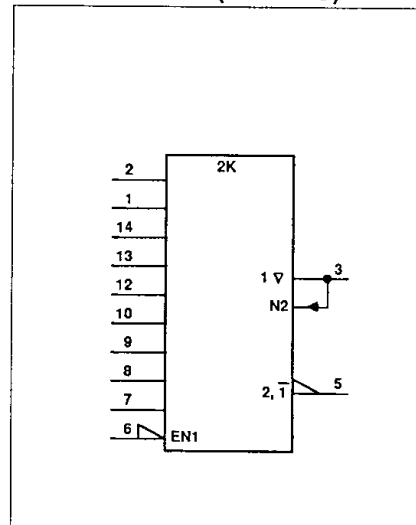

9-bit odd/even parity generator/checker with bus drive I/O port

74AC/ACT11286

tures a local output for parity checking and a bus-driving parity I/O port for parity generation/checking.


The $\overline{\text{XMIT}}$ control input is implemented specifically for cascading for expanding word length. When $\overline{\text{XMIT}}$ is held Low

the parity tree is disabled and the Parity Error output remains at a High logic level regardless of the other inputs ($I_0 - I_8$). When $\overline{\text{XMIT}}$ is High the parity tree is enabled. Parity Error indicates a parity error when either an even number of inputs are High and Parity I/O is forced

to Low, or when an odd number of inputs are High and Parity I/O is forced High.

The I/O control circuitry is designed so that the I/O port will remain in the high-impedance state during power-up or power-down to prevent bus glitches.

LOGIC DIAGRAM

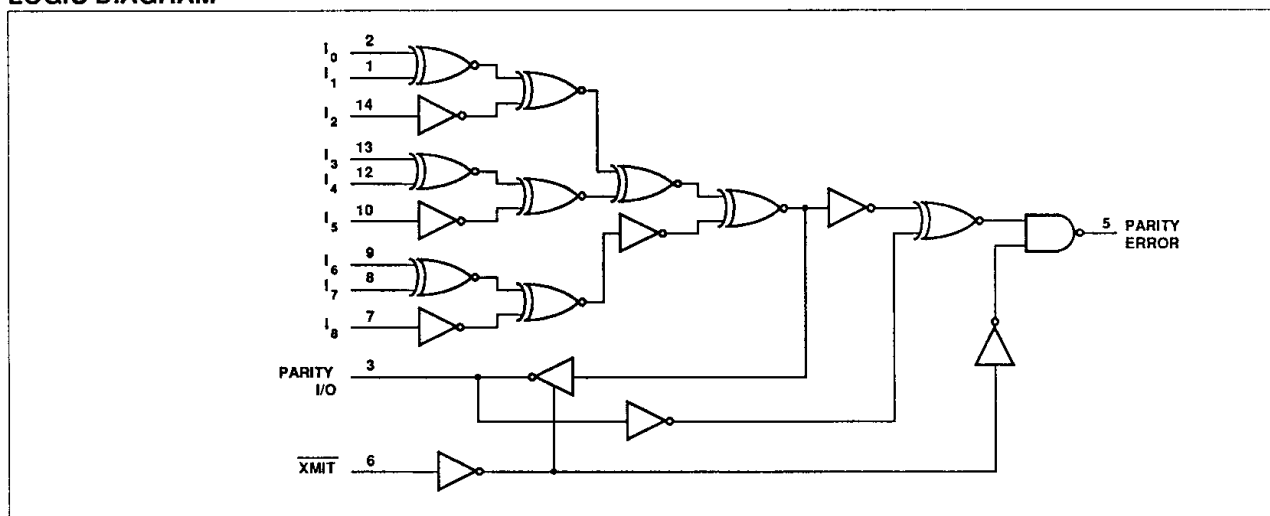

PIN DESCRIPTION

| PIN NUMBER | SYMBOL | NAME AND FUNCTION |
|-------------------------------|--------------------------|-----------------------------|
| 2, 1, 14, 13, 12, 10, 9, 8, 7 | $I_0 - I_8$ | Data inputs |
| 3 | PARITY I/O | Parity I/O |
| 6 | $\overline{\text{XMIT}}$ | Transmit input (active Low) |
| 5 | PARITY ERROR | Parity error output |
| 4 | GND | Ground (0V) |
| 11 | V_{CC} | Positive supply voltage |

FUNCTION TABLE

| Number of High Data Inputs ($I_0 - I_8$) | $\overline{\text{XMIT}}$ | PARITY I/O | PARITY ERROR |
|--|--------------------------|------------|--------------|
| 0, 2, 4, 6, 8 | l | H | H |
| 1, 3, 5, 7, 9 | l | L | H |
| 0, 2, 4, 6, 8 | h | h | H |
| | h | l | L |
| 1, 3, 5, 7, 9 | h | h | L |
| | h | l | H |

l = Low voltage level input
 h = High voltage level input
 H = High voltage level output
 L = Low voltage level output

9-bit odd/even parity generator/checker with bus drive I/O port

74AC/ACT11286

RECOMMENDED OPERATING CONDITIONS

| SYMBOL | PARAMETER | 74AC11286 | | | 74ACT11286 | | | UNIT |
|---------------------|--------------------------------------|------------------|-----|----------|------------|-----|----------|------|
| | | Min | Nom | Max | Min | Nom | Max | |
| V_{CC} | DC supply voltage | 3.0 ¹ | 5.0 | 5.5 | 4.5 | 5.0 | 5.5 | V |
| V_I | Input voltage | 0 | | V_{CC} | 0 | | V_{CC} | V |
| V_O | Output voltage | 0 | | V_{CC} | 0 | | V_{CC} | V |
| $\Delta t/\Delta v$ | Input transition rise or fall rate | 0 | | 10 | 0 | | 10 | ns/V |
| T_{amb} | Operating free-air temperature range | -40 | | +85 | -40 | | +85 | °C |

NOTE:

1. No electrical or switching characteristics are specified at $V_{CC} < 3V$. Operation between 2V and 3V is not recommended, but within that range, a device output will maintain a previously established logic state.

ABSOLUTE MAXIMUM RATINGS¹

| SYMBOL | PARAMETER | TEST CONDITIONS | RATING | UNIT |
|-----------------------------|---|--------------------------------------|------------------------|------|
| V_{CC} | DC supply voltage | | -0.5 TO +7.0 | V |
| I_{IK} or V_I | DC input diode current ² | $V_I < 0$ | -20 | mA |
| | | $V_I > V_{CC}$ | 20 | |
| | DC input voltage | | -0.5 to $V_{CC} + 0.5$ | V |
| I_{OK} or V_O | DC output diode current ² | $V_O < 0$ | -50 | mA |
| | | $V_O > V_{CC}$ | 50 | |
| | DC output voltage | | -0.5 to $V_{CC} + 0.5$ | V |
| I_O | DC output source or sink current per output pin | $V_O = 0$ to V_{CC} | ±50 | mA |
| I_{CC} or I_{GND} | DC V_{CC} current | | ±100 | mA |
| | DC ground current | | ±100 | |
| T_{STG} | Storage temperature | | -65 to 150 | °C |
| P_{TOT} | Power dissipation per package | Above 70°C; derate linearly by 8mW/K | 500 | mW |
| | Power dissipation per package Plastic surface mount (SO) | Above 70°C; derate linearly by 8mW/K | 400 | mW |

NOTES:

- Stresses beyond those listed may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

**9-bit odd/even parity generator/checker
with bus drive I/O port**

74AC/ACT11286

DC ELECTRICAL CHARACTERISTICS

| SYMBOL | PARAMETER | TEST CONDITIONS | V _{CC} V | 74AC11286 | | | | 74ACT11286 | | | | UNIT | |
|--------------------------------------|--|--|-------------------------|--------------------------|------|-----------------------------------|------|--------------------------|------|-----------------------------------|------|------|------|
| | | | | T _{amb} = +25°C | | T _{amb} = -40°C to +85°C | | T _{amb} = +25°C | | T _{amb} = -40°C to +85°C | | | |
| | | | | Min | Max | Min | Max | Min | Max | Min | Max | | |
| V _{IH} | High-level input voltage | | 3.0 | 2.10 | | 2.10 | | | | | | V | |
| | | | 4.5 | 3.15 | | 3.15 | | 2.0 | | 2.0 | | | |
| | | | 5.5 | 3.85 | | 3.85 | | 2.0 | | 2.0 | | | |
| V _{IL} | Low-level input voltage | | 3.0 | | 0.90 | | 0.90 | | | | | V | |
| | | | 4.5 | | 1.35 | | 1.35 | | 0.8 | | 0.8 | | |
| | | | 5.5 | | 1.65 | | 1.65 | | 0.8 | | 0.8 | | |
| V _{OH} | High-level output voltage | V _I = V _{IL} or V _{IH} | I _{OH} = -50μA | 3.0 | 2.9 | | 2.9 | | | | | V | |
| | | | | 4.5 | 4.4 | | 4.4 | | 4.4 | | 4.4 | | |
| | | | | 5.5 | 5.4 | | 5.4 | | 5.4 | | 5.4 | | |
| | | | I _{OH} = -4mA | 3.0 | 2.58 | | 2.48 | | | | | | |
| | | | | 4.5 | 3.94 | | 3.8 | | 3.94 | | 3.8 | | |
| | | | | 5.5 | 4.94 | | 4.8 | | 4.94 | | 4.8 | | |
| I _{OH} = -75mA ¹ | 5.5 | | | 3.85 | | | | 3.85 | | | | | |
| V _{OL} | Low-level output voltage | V _I = V _{IL} or V _{IH} | I _{OL} = 50μA | 3.0 | | 0.1 | | 0.1 | | | | V | |
| | | | | 4.5 | | 0.1 | | 0.1 | | 0.1 | | | 0.1 |
| | | | | 5.5 | | 0.1 | | 0.1 | | 0.1 | | | 0.1 |
| | | | I _{OL} = 12mA | 3.0 | | 0.36 | | 0.44 | | | | | |
| | | | | 4.5 | | 0.36 | | 0.44 | | 0.36 | | | 0.44 |
| | | | I _{OL} = 24mA | 4.5 | | 0.36 | | 0.44 | | 0.36 | | | 0.44 |
| | | | | 5.5 | | 0.36 | | 0.44 | | 0.36 | | | 0.44 |
| I _{OL} = 75mA ¹ | 5.5 | | | | 1.65 | | | | 1.65 | | | | |
| I _I | Input leakage current | V _I = V _{CC} or GND | 5.5 | | ±0.1 | | ±1.0 | | ±0.1 | | ±1.0 | μA | |
| I _{oz} | 3-State output off-state current | V _I = V _{IL} or V _{IH} , V _O = V _{CC} or GND | 5.5 | | ±0.5 | | 5.0 | | ±0.5 | | 5.0 | μA | |
| I _{CC} | Quiescent supply current | V _I = V _{CC} or GND, I _O = 0mA | 5.5 | | 8.0 | | 80 | | 8.0 | | 80 | μA | |
| ΔI _{CC} | Supply current, TTL inputs High ² | One input at 3.4V, other inputs at V _{CC} or GND | 5.5 | | | | | | 0.9 | | 1.0 | mA | |

NOTES:

1. Not more than one output should be tested at a time, and the duration of the test should not exceed 10ms.
2. This is the increase in supply current for each input that is at one of the specified TTL voltage levels rather than 0V or V_{CC}.

**9-bit odd/even parity generator/checker
with bus drive I/O port**

74AC/ACT11286

AC ELECTRICAL CHARACTERISTICS AT 3.3V ±0.3V

| SYMBOL | PARAMETER | WAVEFORM | 74AC11286 | | | | | UNIT |
|--------------------------------------|---|----------|--------------------------|--------------|--------------|-----------------------------------|--------------|------|
| | | | T _{amb} = +25°C | | | T _{amb} = -40°C to +85°C | | |
| | | | Min | Typ | Max | Min | Max | |
| t _{PLH} t _{PHL} | Propagation delay I _n to PARITY I/O | 1 | 2.6 3.8 | 10.0 11.6 | 11.7 14.5 | 2.6 3.8 | 13.1 16.1 | ns |
| t _{PLH} t _{PHL} | Propagation delay I _n to PARITY ERROR | 1 | 3.0 4.0 | 8.5 10.9 | 13.1 16.0 | 3.0 4.0 | 14.7 17.8 | ns |
| t _{PLH} t _{PHL} | Propagation delay PARITY I/O to PARITY ERROR | 1 | 2.2 3.4 | 5.9 7.9 | 7.6 10.2 | 2.2 3.4 | 8.4 11.1 | ns |
| t _{PZH} t _{PHZ} | Propagation delay XMIT to PARITY I/O | 2 | 1.8 3.2 | 4.9 5.4 | 6.4 6.6 | 1.8 3.2 | 7.0 7.0 | ns |
| t _{PZL} t _{PLZ} | Propagation delay XMIT to PARITY I/O | 2 | 3.5 3.2 | 9.7 5.4 | 12.8 6.7 | 3.5 3.2 | 13.6 7.2 | ns |

AC ELECTRICAL CHARACTERISTICS AT 5.0V ±0.5V

| SYMBOL | PARAMETER | WAVEFORM | 74AC11286 | | | | | UNIT |
|--------------------------------------|---|----------|--------------------------|------------|-------------|-----------------------------------|--------------|------|
| | | | T _{amb} = +25°C | | | T _{amb} = -40°C to +85°C | | |
| | | | Min | Typ | Max | Min | Max | |
| t _{PLH} t _{PHL} | Propagation delay I _n to PARITY I/O | 1 | 2.0 3.1 | 5.5 6.9 | 8.0 9.1 | 2.0 3.1 | 9.0 10.7 | ns |
| t _{PLH} t _{PHL} | Propagation delay I _n to PARITY ERROR | 1 | 2.5 3.3 | 5.2 6.5 | 8.9 10.7 | 2.5 3.3 | 10.0 12.0 | ns |
| t _{PLH} t _{PHL} | Propagation delay PARITY I/O to PARITY ERROR | 1 | 1.9 2.9 | 3.9 5.0 | 5.6 7.2 | 1.9 2.9 | 6.2 7.9 | ns |
| t _{PZH} t _{PHZ} | Propagation delay XMIT to PARITY I/O | 2 | 1.4 3.1 | 3.3 4.8 | 4.9 6.1 | 1.4 3.1 | 5.3 6.5 | ns |
| t _{PZL} t _{PLZ} | Propagation delay XMIT to PARITY I/O | 2 | 3.0 3.0 | 5.4 4.6 | 8.3 6.0 | 3.0 3.0 | 8.9 6.3 | ns |



AC ELECTRICAL CHARACTERISTICS AT 5.0V ±0.5V

| SYMBOL | PARAMETER | WAVEFORM | 74ACT11286 | | | | | UNIT |
|--------------------------------------|---|----------|--------------------------|------------|-------------|-----------------------------------|--------------|------|
| | | | T _{amb} = +25°C | | | T _{amb} = -40°C to +85°C | | |
| | | | Min | Typ | Max | Min | Max | |
| t _{PLH} t _{PHL} | Propagation delay I _n to PARITY I/O | 1 | 2.7 3.6 | 6.1 7.3 | 8.0 10.8 | 2.7 3.6 | 10.4 12.0 | ns |
| t _{PLH} t _{PHL} | Propagation delay I _n to PARITY ERROR | 1 | 3.0 3.9 | 6.9 7.7 | 9.7 11.4 | 3.0 3.9 | 11.3 12.9 | ns |
| t _{PLH} t _{PHL} | Propagation delay PARITY I/O to PARITY ERROR | 1 | 2.2 3.1 | 4.6 5.6 | 6.8 8.3 | 2.2 3.1 | 7.7 9.1 | ns |
| t _{PZH} t _{PHZ} | Propagation delay XMIT to PARITY I/O | 2 | 1.8 4.7 | 4.2 6.5 | 6.3 7.9 | 1.8 4.7 | 7.3 8.5 | ns |
| t _{PZL} t _{PLZ} | Propagation delay XMIT to PARITY I/O | 2 | 3.0 4.1 | 6.3 6.0 | 9.4 7.3 | 3.0 4.1 | 11.4 7.8 | ns |

9-bit odd/even parity generator/checker with bus drive I/O port

74AC/ACT11286

AC WAVEFORMS

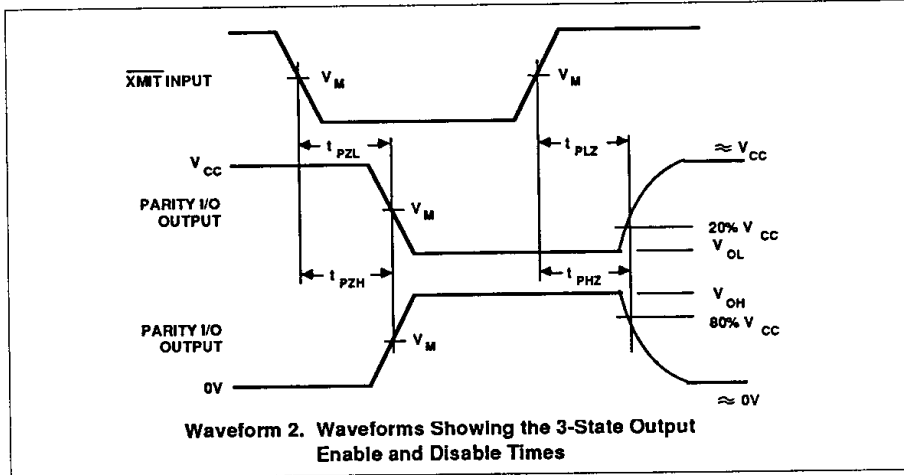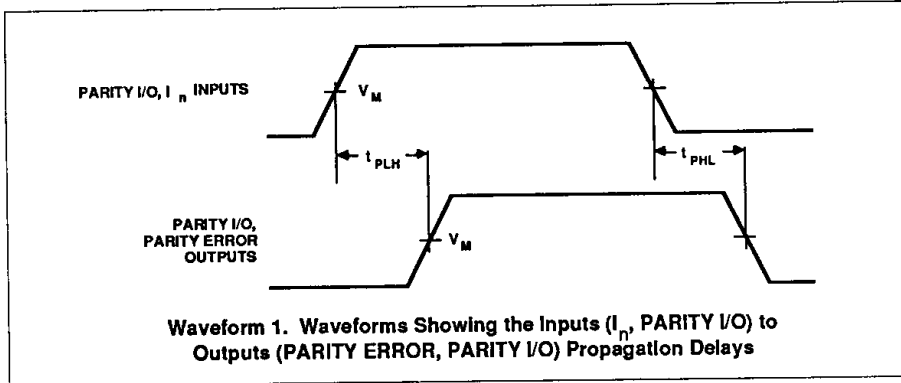

WAVEFORM CONDITIONS

| | INPUTS | OUTPUTS |
|-----|---|---------------------------------------|
| AC | $V_{IN} = \text{GND to } V_{CC}$ $V_M = 50\% V_{CC}$ | $V_{OUT} = V_{OL} \text{ to } V_{OH}$ |
| ACT | $V_{IN} = \text{GND to } 3.0V$ $V_M = 1.5V$ | $V_M = 50\% V_{CC}$ |

**9-bit odd/even parity generator/checker
with bus drive I/O port**

74AC/ACT11286

TEST CIRCUIT

