

E-Series RF 16:1 Transformer

0.06 – 60 MHz

ET16-6T-SM1

V1


Features

- 16:1 Impedance Ratio
- CT on Secondary
- Surface Mount
- Tape and reel packaging available

Description

M/A-COM's ET16-6T-SM1 is a 16:1 RF transformer in a low cost, surface mount package. Ideally suited for high volume cellular and wireless applications. Typical applications include single to balanced mode conversion and impedance matching. Parts are packaged in tape & reel.

SM - 1 Package

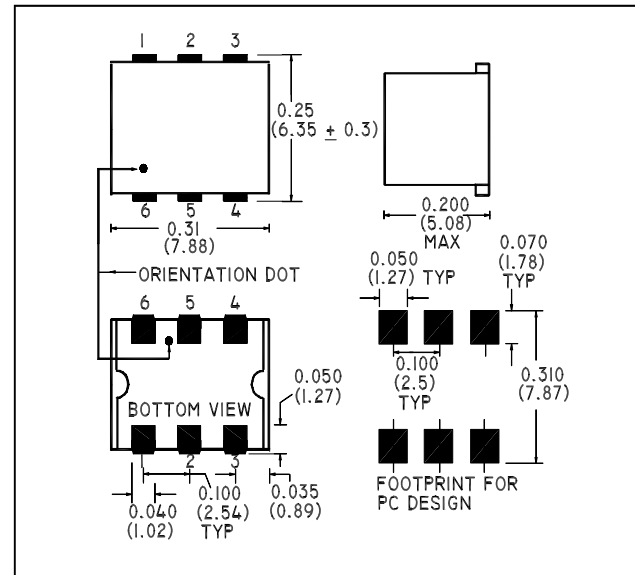

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$ ¹

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
RF Frequency	—	0.06 - 60	MHz	—	—	—
Insertion Loss	$F_L - f_U$	0.06 - 60	dB	—	—	3.0
		0.08 - 40	dB	—	—	2.0
		0.15 - 15	dB	—	—	1.0
Amplitude Unbalance	$F_L - f_U$	0.06 - 30	dB	—	—	0.3
		0.06 - 60	dB	—	—	0.6
Phase Unbalance	$F_L - f_U$	0.06 - 20	Degrees	—	—	1°
		0.06 - 60	Degrees	—	—	4°

Absolute Maximum Ratings¹

Parameter	Absolute Maximum
RF Power	250 mW
DC Current	30 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

1. Operation of this device above any one of these parameters may cause permanent damage.

Ordering Information

Part Number	Package
ET16-6T-SM1TR	Tape and Reel (900 piece Reel)

1

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

E-Series RF 16:1 Transformer
 0.06 – 60 MHz

 ET16-6T-SM1
 V1

Pin Configuration

Pin No.	Function
1	Secondary
2	Secondary CT
3	Secondary Dot
4	Primary Dot
5	Not Connected
6	Primary

Schematic

