


P-channel Enhancement-mode Power MOSFET

PRODUCT SUMMARY

BV_{DSS}	-30V
$R_{DS(ON)}$	50m Ω
I_D	-5.3A

 **Pb-free; RoHS-compliant SO-8**

www.DataSheet4U.com

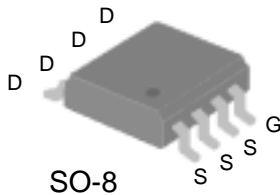

DESCRIPTION

The SSM9435GM achieves fast switching performance with low gate charge without a complex drive circuit. It is suitable for low voltage applications such as battery management and general high-side switch circuits.

The SSM9435GM is supplied in an RoHS-compliant SO-8 package, which is widely used for medium power commercial and industrial surface mount applications.

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Units
V_{DS}	Drain-source voltage	-30	V
V_{GS}	Gate-source voltage	± 20	V
I_D	Continuous drain current, $T_C = 25^\circ\text{C}$	-5.3	A
		$T_C = 70^\circ\text{C}$	-4.7
I_{DM}	Pulsed drain current ¹	-20	A
P_D	Total power dissipation, $T_C = 25^\circ\text{C}$	2.5	W
	Linear derating factor	0.02	W/ $^\circ\text{C}$
T_{STG}	Storage temperature range	-55 to 150	$^\circ\text{C}$
T_J	Operating junction temperature range	-55 to 150	$^\circ\text{C}$

THERMAL CHARACTERISTICS

Symbol	Parameter	Value	Units
$R_{\theta JA}$	Maximum thermal resistance, junction-ambient ³	50	$^\circ\text{C}/\text{W}$

Notes:

1. Pulse width must be limited to avoid exceeding the maximum junction temperature of 150 $^\circ\text{C}$.
2. Pulse width <300us, duty cycle <2%.
3. Mounted on a square inch of copper pad on FR4 board ; 125 $^\circ\text{C}/\text{W}$ when mounted on the minimum pad area required for soldering.

ELECTRICAL CHARACTERISTICS (at $T_j = 25^\circ\text{C}$, unless otherwise specified)

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{DSS}	Drain-source breakdown voltage	$V_{GS}=0V, I_D=-250\mu A$	-30	-	-	V
$\Delta BV_{DSS}/\Delta T_j$	Breakdown voltage temperature coefficient	Reference to 25°C , $I_D=-1\text{mA}$	-	-0.04	-	$V/^\circ\text{C}$
$R_{DS(ON)}$	Static drain-source on-resistance ²	$V_{GS}=-10V, I_D=-5.3A$	-	-	50	$m\Omega$
		$V_{GS}=-4.5V, I_D=-4.2A$	-	-	90	$m\Omega$
$V_{GS(th)}$	Gate threshold voltage	$V_{DS}=V_{GS}, I_D=-250\mu A$	-1	-	-3	V
g_{fs}	Forward transconductance	$V_{DS}=-10V, I_D=-5.3A$	-	10	-	S
I_{DSS}	Drain-source leakage current	$V_{DS}=-30V, V_{GS}=0V$	-	-	-1	μA
		$V_{DS}=-24V, V_{GS}=0V, T_j = 70^\circ\text{C}$	-	-	-25	μA
I_{GSS}	Gate-source leakage current	$V_{GS}=\pm 20V$	-	-	± 100	nA
Q_g	Total gate charge ²	$I_D=-5.3A$	-	9	15	nC
Q_{gs}	Gate-source charge	$V_{DS}=-24V$	-	3	-	nC
Q_{gd}	Gate-drain ("Miller") charge	$V_{GS}=-4.5V$	-	5	-	nC
$t_{d(on)}$	Turn-on delay time ²	$V_{DS}=-15V$	-	11	-	ns
t_r	Rise time	$I_D=-1A$	-	8	-	ns
$t_{d(off)}$	Turn-off delay time	$R_G=6\Omega, V_{GS}=-10V$	-	25	-	ns
t_f	Fall time	$R_D=15\Omega$	-	17	-	ns
C_{iss}	Input capacitance	$V_{GS}=0V$	-	507	810	pF
C_{oss}	Output capacitance	$V_{DS}=-15V$	-	222	-	pF
C_{rss}	Reverse transfer capacitance	$f=1.0\text{MHz}$	-	158	-	pF

Source-Drain Diode

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{SD}	Forward voltage ²	$I_S=-2.6A, V_{GS}=0V$	-	-	-1.2	V
t_{rr}	Reverse-recovery time	$I_S=-5.3A, V_{GS}=0V,$	-	29	-	ns
Q_{rr}	Reverse-recovery charge	$dI/dt=100A/\mu s$	-	20	-	nC

Notes:

1. Pulse width must be limited to avoid exceeding the maximum junction temperature of 150°C .
2. Pulse width $<300\mu s$, duty cycle $<2\%$.

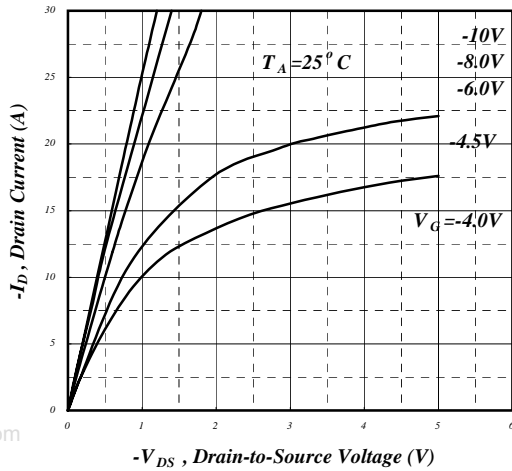


Fig 1. Typical Output Characteristics

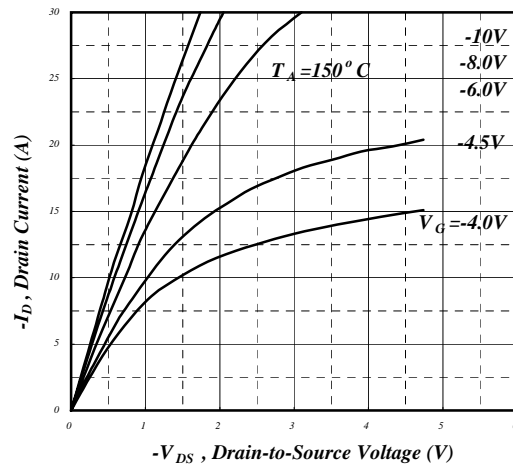


Fig 2. Typical Output Characteristics

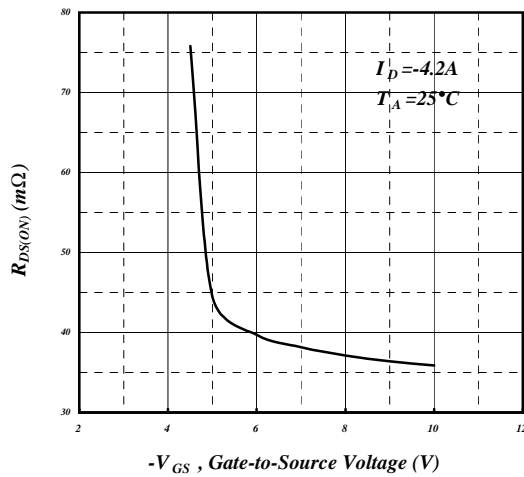


Fig 3. On-Resistance vs. Gate Voltage

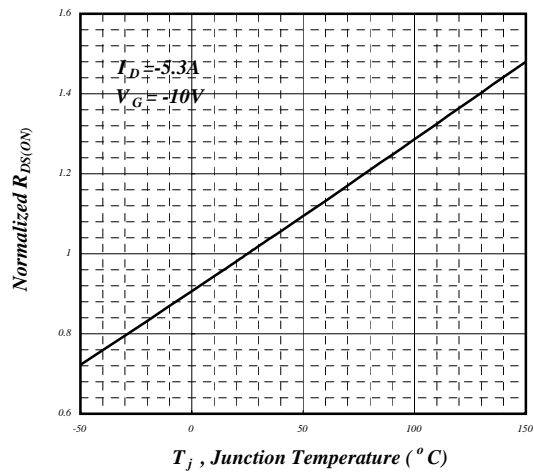


Fig 4. Normalized On-Resistance vs. Junction Temperature

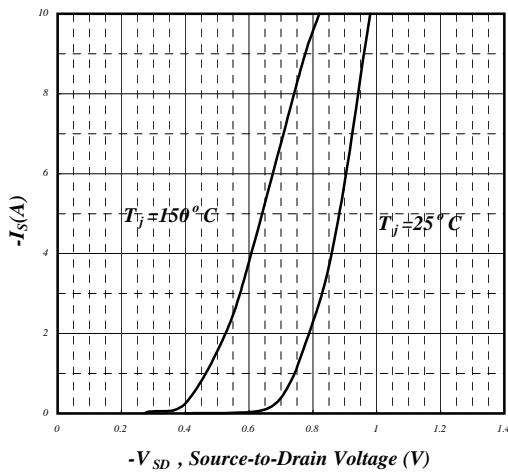


Fig 5. Forward Characteristic of Reverse Diode

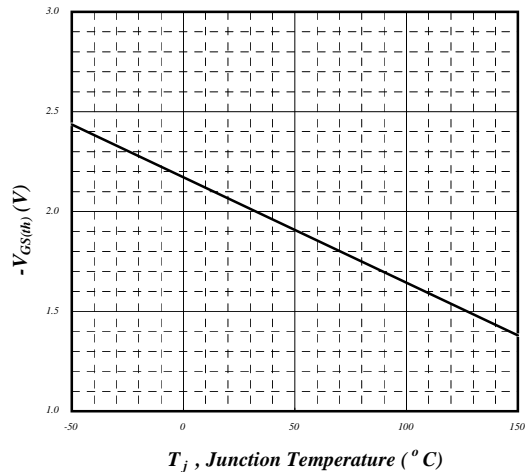


Fig 6. Gate Threshold Voltage vs. Junction Temperature

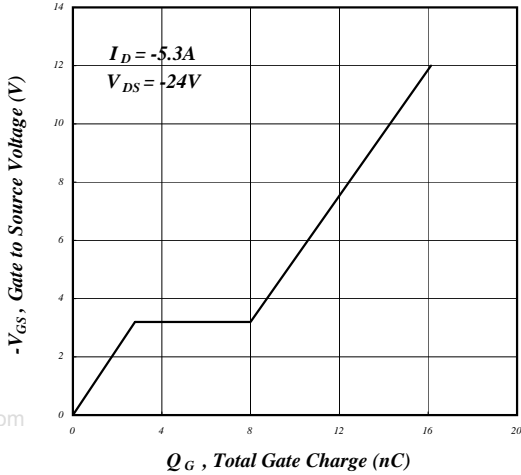


Fig 7. Gate Charge Characteristics

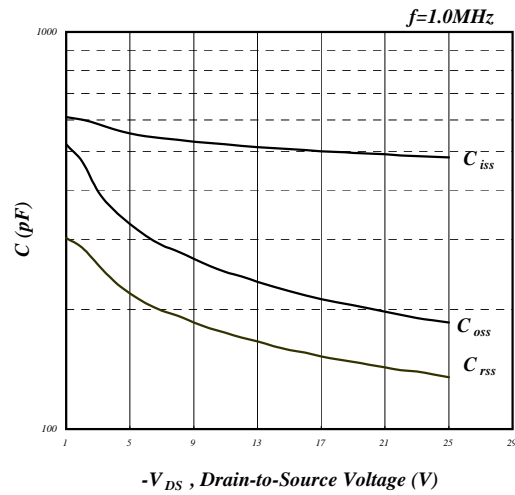


Fig 8. Typical Capacitance Characteristics

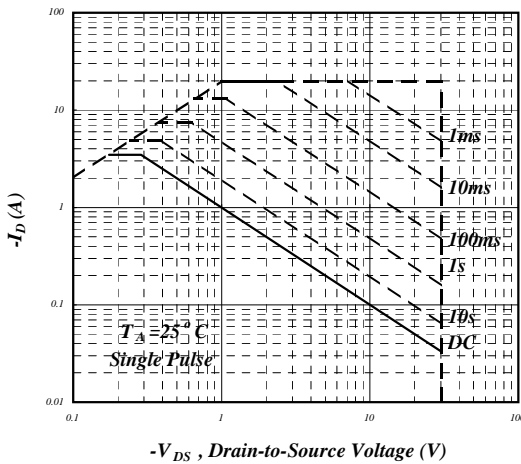


Fig 9. Maximum Safe Operating Area

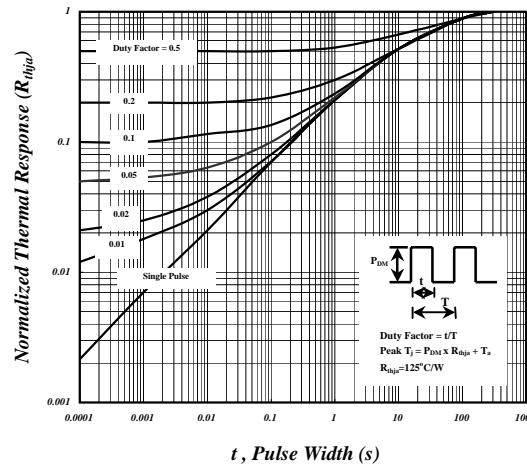


Fig 10. Effective Transient Thermal Impedance

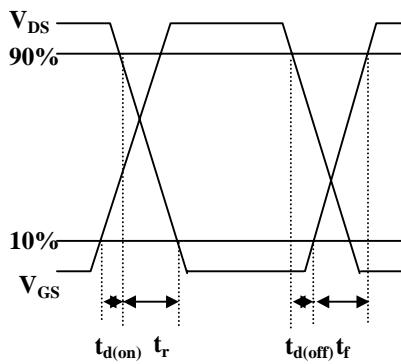


Fig 11. Switching Time Waveform


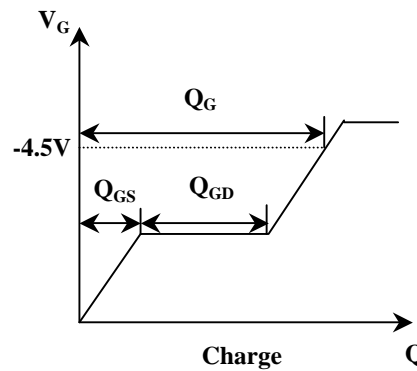


Fig 12. Gate Charge Waveform


PHYSICAL DIMENSIONS

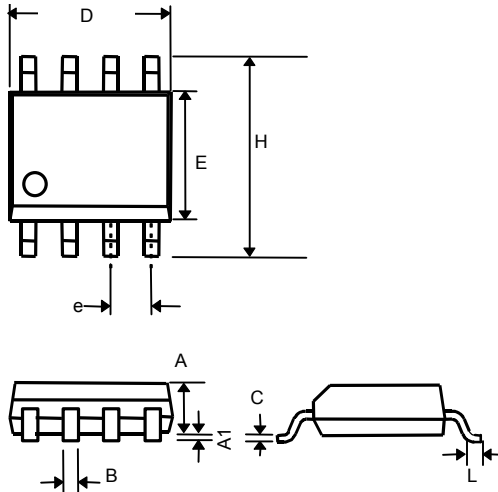

SYMBOL	MIN	MAX
A	1.35	1.75
A1	0.10	0.25
B	0.33	0.51
C	0.19	0.25
D	4.80	5.00
E	3.80	4.00
e	1.27(TYP)	
H	5.80	6.50
L	0.38	1.27

All dimensions in millimeters.
Dimensions do not include mold protrusions.

PART MARKING

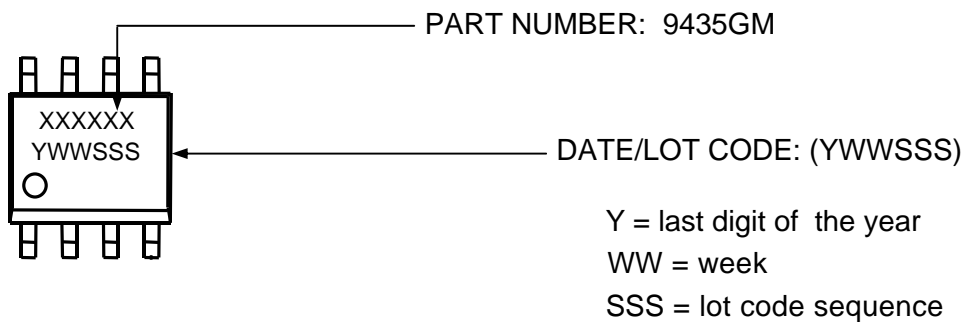

PACKING: Moisture sensitivity level MSL3

3000 pcs in antistatic tape on a 13 inch (330mm) reel packed in a moisture barrier bag (MBB).