

**Magnecraft**

191 Waukegan Rd, Ste 206  
Northfield, IL 60093-2743

**Phone:** (847)441-2526

**Fax:** (847)441-2522

**Email:** info@magnecraft.com


**Item # 70-782EL11-1, 70782EL11-1 Socket / 10 Amp Rating, 300 Volts**

**QUOTE**

**70782EL11-1 Socket / 10 Amp Rating, 300 Volts**

11 Pin Ice Cube, Logic Style, DIN Panel Mount with Elevator Terminals, Module Compatible.

This Item is Normally Stocked

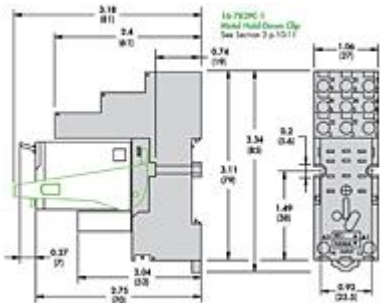

[SPECIFICATIONS](#) · [ELECTRICAL RATING](#) · [TEMPERATURE](#) · [CONSTRUCTION](#) · [MISCELLANEOUS](#) · [PRODUCT CERTIFICATIONS](#)

**SPECIFICATIONS**

Contact Configuration	3PDT
Number of Terminals	11
Mounting Style	DIN mount

**ELECTRICAL RATING**

www.magnecraft.com

Nominal Current Rating	10 A
Nominal Voltage Rating	300 V

**TEMPERATURE**

Storage Range	- 40 to + 105 °C
---------------	------------------

## CONSTRUCTION

Protection Category (Finger Safe), EN 60529	IP 20
Internal Metal Tracks	Copper Alloy Zinc Plated
Screw Terminals	Steel Zinc Plated
Screw Style	Combination Head
Screw Size	M3 mm
Screw Torque 3 mm (Maximum)	7 / 0.8 Lb-in / Nm

## MISCELLANEOUS

Socket Mounting	Din / Panel
Wire Size Capacity (Maximum), EN 60204-1, Solid Cu	14 / 16 (2) AWG, 2.5 / 1.5 (2) mm <sup>2</sup>
Wire Size Capacity (Maximum), EN 60204-1, Stranded Cu	14 / 16 (2) AWG, 2.5 / 1.5 (2) mm <sup>2</sup>
Wire Connection Method	Elevator
DIN Rail Mounting, EN 60715	35 mm
Chassis Mount Screw Torque	7 / 0.8 Lb-in / Nm
Flammability Rating	94V-0 Class
Body Color	Light Gray
DIN Locking Method	Red Plastic Locking Clip

## PRODUCT CERTIFICATIONS

Agency Approvals	RoHS UL CSA
------------------	-------------------