

5.0 x 3.2 x 1.6 mm

# 5.0 Vdc or 3.3 Vdc • LOW PROFILE ULTRA MINIATURE CERAMIC SURFACE MOUNT CRYSTAL CLOCK OSCILLATORS ASF1, ASFL and ASFL1

## FEATURES:


- Compact and low in height.(1.6 mm or 1.2 mm max.)
- Low current consumption.
- Tri state function.
- Suitable for high density SMT., Reflow capable.
- Tight stability option.
- Glass sealed package.

## APPLICATIONS:

- CCD clock for VTR camera.
- Equipment connected to PC or PC cards.
- Thin equipment.

## STANDARD SPECIFICATIONS

| PARAMETERS  | ASF1   | ASFL  | ASFL1            |
|---|--|---|------------------|
| Frequency Range (F <sub>o</sub> )                       | 1.50MHz ~ 125MHz   |   |                  |
| Operating Temperature (T <sub>OPR</sub> )               | -10°C to +70°C   |   |                  |
| Storage Temperature (T <sub>STO</sub> )                 | -50°C to +125°C  |   |                  |
| Frequency Stability (ΔF / F <sub>o</sub> )              | ±100ppm max. (See Options)                                       |   |                  |
| Supply Voltage (V <sub>dd</sub> )                       | 5.0 Vdc ±10%   | 3.3Vdc ±10%   |                  |
| Input Current (I <sub>dd</sub> )                        | 20mA max.<br>45mA max.<br>50mA max.<br>100mA max.                | 12mA max. for (F < 33MHz)<br>25mA max. for (F < 50MHz)<br>35mA max. for (F < 70MHz)<br>60mA max. for (F ≤ 125MHz) |                  |
| Duty Cycle or Symmetry                                  | 40 / 60% max. (See Options)                                      |   |                  |
| Rise and Fall Times (T <sub>R</sub> / T <sub>F</sub> )  | 6ns max.   |   |                  |
| Output Load   | 5TTL or 15pF(50pF max.)<br>2TTL or 15pF                          | 5TTL or 15pF(30pF max.) for F < 70MHz<br>2TTL or 15pF for F ≥ 70MHz   |                  |
| Output Voltage (V <sub>OH</sub> )<br>(V <sub>OL</sub> ) | "1" 0.9 * V <sub>dd</sub> min.<br>"0" 0.1 * V <sub>dd</sub> max. |   |                  |
| Tri-State Function                                      | "1" or Open: Oscillation<br>"0": Output disabled (Hi Z)          |   | ≥ 2.2V<br>< 0.8V |
| Start-up Time   | 10ms max.  |   |                  |
| Aging per Year  | ±5ppm @ 25°C   |   |                  |

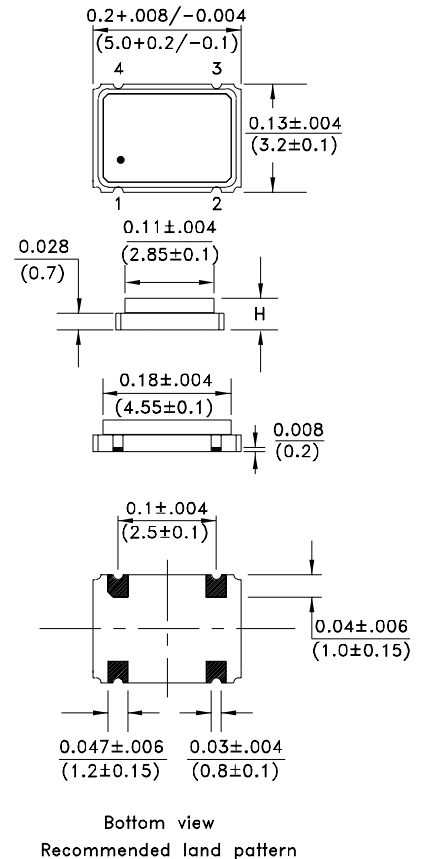

Connect a By-Pass capacitor 0.01 μF between V<sub>dd</sub> and GND.  
Environmental, and mechanical specifications, see appendix C. Group 2.  
Marking, see appendix G. Test circuit, waveforms, see appendix B.  
Tape and Reel, see appendix H.(1,000 pcs/reel).  
Reflow profile, see appendix E.  
Application notes, see appendix A.


| PIN NO. | FUNCTION        |
|---------|-----------------|
| 1       | Tri State       |
| 2       | GND / Case      |
| 3       | Output          |
| 4       | V <sub>dd</sub> |

## ORDERING OPTIONS

ASFXX - Frequency - Temperature - Overall Frequency Stability - Duty Cycle - Packaging

|            |  |  |
|------------|--|--|
| Blank or L | - E for -20°C to + 70°C<br>- F for -30°C to + 70°C<br>- N for -30°C to + 85°C<br>- L for -40°C to + 85°C | - J for ± 20ppm max.*<br>- R for ± 25ppm max.*<br>- K for ± 30ppm max.*<br>- H for ± 35ppm max.*<br>- B for ± 40ppm max.<br>- C for ± 50ppm max. |
|------------|--|--|

|                                       |
|---------------------------------------|
| -T<br>(Tape & Reel)                   |
| -S for 45 / 55% @ 1/2 V <sub>dd</sub> |

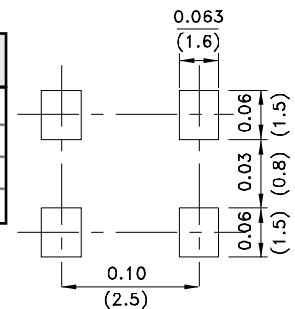

| P/N         | H                        |
|-------------|--------------------------|
| ASFL        | 0.063±.006<br>(1.6±0.15) |
| ASF1, ASFL1 | 0.043±.004<br>(1.1±0.1)  |

Dimensions: Inches (mm)

\* Vary with frequency and temperature.