








Multilayer Ceramic Capacitors **Chip**
X8R

Ordering code system

												
B37541	K	5	102	K	0	60						
			Packaging 60 \triangle cardboard tape, 180-mm reel 62 \triangle blister tape, 180-mm reel 70 \triangle cardboard tape, 330-mm reel 72 \triangle blister tape, 330-mm reel									
			Internal coding									
			Capacitance tolerance J \triangle \pm 5 % K \triangle \pm 10 % (standard) M \triangle \pm 20 %									
			Capacitance, coded 102 \triangle <u>10</u> · 10 ² pF = 1 nF (example) 103 \triangle <u>10</u> · 10 ³ pF = 10 nF									
			<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: left;">Rated voltage</td> <td style="text-align: center; border-right: 1px solid black;">Rated voltage [VDC]</td> <td style="text-align: center;">50</td> </tr> <tr> <td></td> <td style="text-align: center; border-right: 1px solid black;">Code</td> <td style="text-align: center;">5</td> </tr> </table>				Rated voltage	Rated voltage [VDC]	50		Code	5
Rated voltage	Rated voltage [VDC]	50										
	Code	5										
			<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="text-align: left;">Termination</td> <td style="padding-left: 20px;">Standard: K \triangle nickel barrier for all case sizes</td> </tr> <tr> <td></td> <td style="padding-left: 20px;">On request: J \triangle silver-palladium for conductive adhesion for all case sizes</td> </tr> </table>				Termination	Standard: K \triangle nickel barrier for all case sizes		On request: J \triangle silver-palladium for conductive adhesion for all case sizes		
Termination	Standard: K \triangle nickel barrier for all case sizes											
	On request: J \triangle silver-palladium for conductive adhesion for all case sizes											

Type and size	
Chip size (inch / mm)	Temperature characteristic X8R
0603 / 1608	B37531
0805 / 2012	B37541
1206 / 3216	B37472
1210 / 3225	B37550

Features

- Wide temperature range up to 150 °C
- High volumetric efficiency
- Non-linear capacitance change
- High insulation resistance
- High pulse strength


Applications

- Automotive
- Blocking
- Coupling
- Decoupling
- Interference suppression

Termination

- For soldering: Nickel-barrier terminations (Ni)

Options

- Alternative capacitance tolerances available on request

Delivery mode

- Cardboard and blister tape (blister tape for chip thickness $\geq 1,2 \pm 0,1$ mm and case size 1210) 180-mm and 330-mm reel available


Electrical data

Temperature characteristic		X8R	
Climatic category (IEC 60068-1)		55/150/56	
Standard		EIA	
Dielectric		Class 2	
Rated voltage ¹⁾	V_R	50	VDC
Test voltage	V_{test}	$2,5 \cdot V_R/5$ s	VDC
Capacitance range / E series	C_R	100 pF ... 150 nF (E6)	
Max. relative capacitance change	$\Delta C/C$	± 15	%
Dissipation factor (limit value)	$\tan \delta$	$< 25 \cdot 10^{-3}$	
Insulation resistance ²⁾ at + 25 °C	R_{ins}	$> 10^5$	M Ω
Insulation resistance ²⁾ at +125 °C	R_{ins}	$> 10^4$	M Ω
Time constant ²⁾ at + 25 °C	τ	> 1000	s
Time constant ²⁾ at +125 °C	τ	> 100	s
Operating temperature range	T_{op}	-55 ... +150	°C
Ageing ³⁾		yes	


1) Note: No operation on AC line.

2) For $C_R > 10$ nF the time constant $\tau = C \cdot R_{ins}$ is given.

3) Refer to chapter "General Technical Information", page 197.


Capacitance tolerances

Code letter	J	K (standard)	M
Tolerance	±5%	±10%	±20%

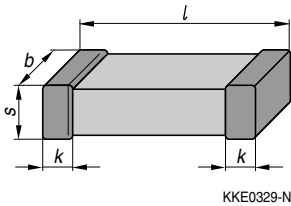
Dimensional drawing

Dimensions (mm)

Case size (inch) (mm)	0603 1608	0805 2012	1206 3216	1210 3225
<i>l</i>	1,6 ± 0,15	2,0 ± 0,20	3,2 ± 0,20	3,2 ± 0,30
<i>b</i>	0,8 ± 0,10	1,25 ± 0,15	1,6 ± 0,15	2,5 ± 0,30
<i>s</i>	0,8 ± 0,10	1,30 max.	1,30 max.	1,30 max.
<i>k</i>	0,1 – 0,4	0,13 – 0,75	0,25 – 0,75	0,25 – 0,75

Tolerances to CECC 32101-801



Recommended solder pad




KKE0308-1

Maximum dimensions (mm)

Case size	(inch/mm)	Type	A	C	D
0603	1608	single chip	1,0	3,0	1,0
0805	2012	single chip	1,2	3,4	1,3
1206	3216	single chip	1,2	4,5	1,8
1210	3225	single chip	1,2	4,5	2,8

Termination

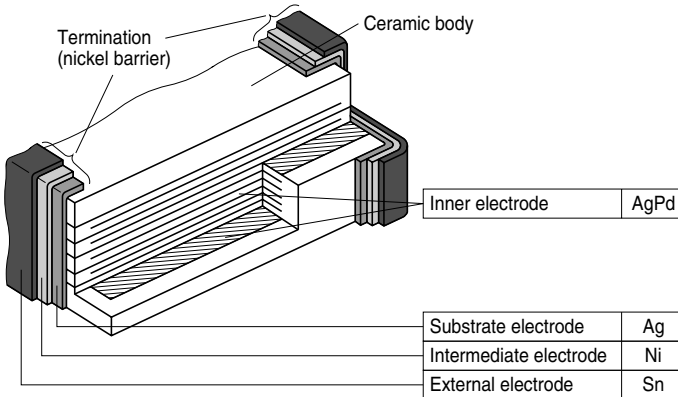

KKE0484-W



Product range chip capacitors

		X8R							
Size ¹⁾ inch mm	0603 1608		0805 2012		1206 3216		1210 3225		
	B37531		B37541		B37472		B37550		
Type	50		50		50		50		
V_R (VDC)	50		50		50		50		
C_R	50		50		50		50		
100 pF									
150 pF									
220 pF									
330 pF									
470 pF									
680 pF									
1,0 nF									
1,5 nF									
2,2 nF									
3,3 nF									
4,7 nF									
6,8 nF									
10 nF									
15 nF									
22 nF									
33 nF									
47 nF									
68 nF									
100 nF									
150 nF									

1) $l \times b$ (inch) / $l \times b$ (mm)

Multilayer Ceramic Capacitors
X8R; 0603 and 0805
X8R
Ordering codes and packing for X8R, 50 VDC, nickel-barrier terminations

$C_R^{1)}$	Ordering code ²⁾	Chip thickness mm	Cardboard tape, ∅ 180-mm reel	Cardboard tape, ∅ 330-mm reel
			** \triangle 60	** \triangle 70
			pcs/reel	pcs/reel

Case size 0603, 50 VDC

100 pF	B37531K5101K0**	0,8 ± 0,1	4000	16000
150 pF	B37531K5151K0**	0,8 ± 0,1	4000	16000
220 pF	B37531K5221K0**	0,8 ± 0,1	4000	16000
330 pF	B37531K5331K0**	0,8 ± 0,1	4000	16000
470 pF	B37531K5471K0**	0,8 ± 0,1	4000	16000
680 pF	B37531K5681K0**	0,8 ± 0,1	4000	16000
1,0 nF	B37531K5102K0**	0,8 ± 0,1	4000	16000
1,5 nF	B37531K5152K0**	0,8 ± 0,1	4000	16000
2,2 nF	B37531K5222K0**	0,8 ± 0,1	4000	16000
3,3 nF	B37531K5332K0**	0,8 ± 0,1	4000	16000
4,7 nF	B37531K5472K0**	0,8 ± 0,1	4000	16000

Case size 0805, 50 VDC

470 pF	B37541K5471K0**	0,6 ± 0,1	5000	20000
680 pF	B37541K5681K0**	0,6 ± 0,1	5000	20000
1,0 nF	B37541K5102K0**	0,6 ± 0,1	5000	20000
1,5 nF	B37541K5152K0**	0,6 ± 0,1	5000	20000
2,2 nF	B37541K5222K0**	0,6 ± 0,1	5000	20000
3,3 nF	B37541K5332K0**	0,6 ± 0,1	5000	20000
4,7 nF	B37541K5472K0**	0,6 ± 0,1	5000	20000
6,8 nF	B37541K5682K0**	0,6 ± 0,1	5000	20000
10 nF	B37541K5103K0**	0,6 ± 0,1	5000	20000
15 nF	B37541K5153K0**	0,6 ± 0,1	5000	20000
22 nF	B37541K5223K0**	0,6 ± 0,1	5000	20000

1) Other capacitance values on request.

2) The table contains the ordering codes for the standard capacitance tolerance.
For other available capacitance tolerances see page 72.


Ordering codes and packing for X8R, 50 VDC, nickel-barrier terminations

$C_R^{1)}$	Ordering code ²⁾	Chip thickness mm	Cardboard tape, Ø 180-mm reel	Cardboard tape, Ø 330-mm reel
			** \triangle 60	** \triangle 70
			pcs/reel	pcs/reel

Case size 1206, 50 VDC

1,0 nF	B37472K5102K0**	0,8 ± 0,1	4000	16000
1,5 nF	B37472K5152K0**	0,8 ± 0,1	4000	16000
2,2 nF	B37472K5222K0**	0,8 ± 0,1	4000	16000
3,3 nF	B37472K5332K0**	0,8 ± 0,1	4000	16000
4,7 nF	B37472K5472K0**	0,8 ± 0,1	4000	16000
6,8 nF	B37472K5682K0**	0,8 ± 0,1	4000	16000
10 nF	B37472K5103K0**	0,8 ± 0,1	4000	16000
15 nF	B37472K5153K0**	0,8 ± 0,1	4000	16000
22 nF	B37472K5223K0**	0,8 ± 0,1	4000	16000
33 nF	B37472K5333K0**	0,8 ± 0,1	4000	16000
47 nF	B37472K5473K0**	0,8 ± 0,1	4000	16000
68 nF	B37472K5683K0**	1,2 ± 0,1	3000 ³⁾	12000 ⁴⁾
100 nF	B37472K5104K0**	1,2 ± 0,1	3000 ³⁾	12000 ⁴⁾
			Blister tape, Ø 180-mm reel	Blister tape, Ø 330-mm reel
			** \triangle 62	** \triangle 72
			pcs/reel	pcs/reel

Case size 1210, 50 VDC

10 nF	B37550K5103K0**	0,8 ± 0,1	4000	16000
15 nF	B37550K5153K0**	0,8 ± 0,1	4000	16000
22 nF	B37550K5223K0**	0,8 ± 0,1	4000	16000
33 nF	B37550K5333K0**	0,8 ± 0,1	4000	16000
47 nF	B37550K5473K0**	0,8 ± 0,1	4000	16000
68 nF	B37550K5683K0**	0,8 ± 0,1	4000	16000
100 nF	B37550K5104K0**	0,8 ± 0,1	4000	16000
150 nF	B37550K5154K0**	1,2 ± 0,1	3000	12000

1) Other capacitance values on request.

2) The table contains the ordering codes for the standard capacitance tolerance.

For other available capacitance tolerances see page 72.


3) Blister tape, 180-mm reel, ordering code ** \triangle 62

4) Blister tape, 330-mm reel, ordering code ** \triangle 72




Typical characteristics


Capacitance change $\Delta C/C_{25}$ versus temperature T

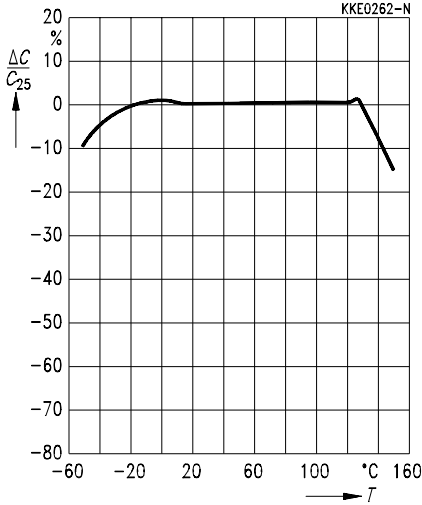


Capacitance change $\Delta C/C_0$ versus superimposed DC voltage V

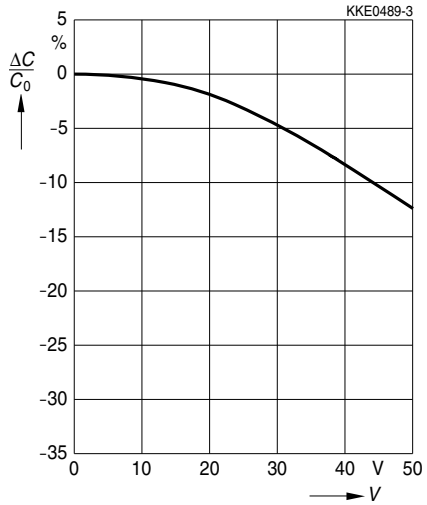

Impedance $|Z|$ versus frequency f

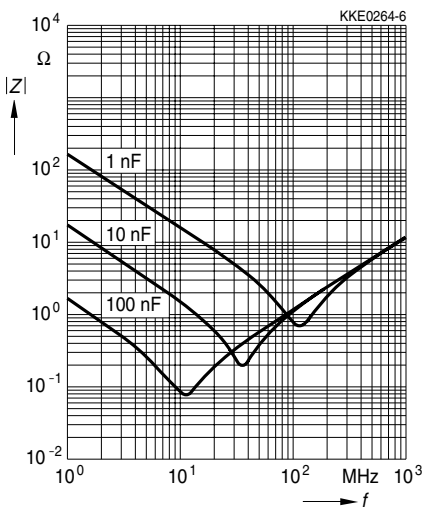


Dissipation factor $\tan \delta$ versus temperature T

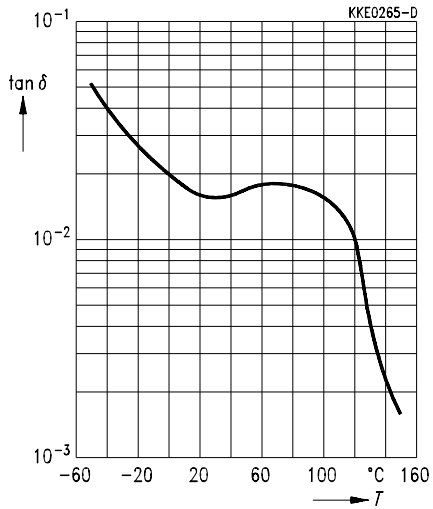


Typical characteristics

Insulation resistance R_{ins} versus temperature T

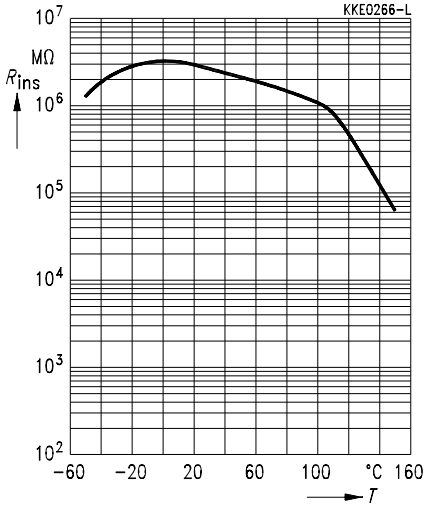

Capacitance change $\Delta C/C_1$ versus time t

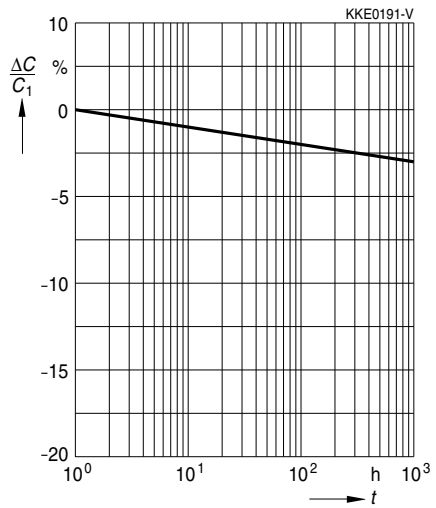

Herausgegeben von EPCOS AG

Unternehmenskommunikation, Postfach 80 17 09, 81617 München, DEUTSCHLAND

☎ ++49 89 636 09, FAX (0 89) 636-2 26 89

© EPCOS AG 2002. Vervielfältigung, Veröffentlichung, Verbreitung und Verwertung dieser Broschüre und ihres Inhalts ohne ausdrückliche Genehmigung der EPCOS AG nicht gestattet.

Bestellungen unterliegen den vom ZVEI empfohlenen Allgemeinen Lieferbedingungen für Erzeugnisse und Leistungen der Elektroindustrie, soweit nichts anderes vereinbart wird.

Diese Broschüre ersetzt die vorige Ausgabe.

Fragen über Technik, Preise und Liefermöglichkeiten richten Sie bitte an den Ihnen nächstgelegenen Vertrieb der EPCOS AG oder an unsere Vertriebsgesellschaften im Ausland. Bauelemente können aufgrund technischer Erfordernisse Gefahrstoffe enthalten. Auskünfte darüber bitten wir unter Angabe des betreffenden Typs ebenfalls über die zuständige Vertriebsgesellschaft einzuholen.

Published by EPCOS AG

Corporate Communications, P.O. Box 80 17 09, 81617 Munich, GERMANY

☎ ++49 89 636 09, FAX (0 89) 636-2 26 89

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.