

International  
**IR** Rectifier

30CPQ080PbF  
 30CPQ100PbF

SCHOTTKY RECTIFIER

30 Amp

$$I_{F(AV)} = 30\text{Amp}$$

$$V_R = 80 - 100\text{V}$$

#### Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	30	A
$V_{RRM}$	80-100	V
$I_{FSM}$ @tp = 5 $\mu$ s sine	920	A
$V_F$ @ 15 Apk, $T_J = 125^\circ\text{C}$ (per leg)	0.67	V
$T_J$	-55 to 175	$^\circ\text{C}$

#### Description/ Features

The 30CPQ...PbF center tap Schottky rectifier has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.


- 175° C  $T_J$  operation
- Center tap TO-247 package
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free ("PbF" suffix)

#### Case Styles

30CPQ...PbF



TO-247AC



## Voltage Ratings

Part number	30CPQ080PbF	30CPQ100PbF
V <sub>R</sub> Max. DC Reverse Voltage (V)	80	100
V <sub>RRM</sub> Max. Working Peak Reverse Voltage (V)		

## Absolute Maximum Ratings

Parameters	30CPQ...	Units	Conditions
I <sub>F(AV)</sub> Max. Average Forward Current * See Fig. 5	30	A	50% duty cycle @ T <sub>C</sub> = 140°C, rectangular wave form
I <sub>FSM</sub> Max. Peak One Cycle Non-Repetitive Surge Current (Per Leg) * See Fig. 7	920	A	Following any rated load condition and with rated V <sub>RRM</sub> applied
	240		
E <sub>AS</sub> Non-Repetitive Avalanche Energy (Per Leg)	7.50	mJ	T <sub>J</sub> = 25°C, I <sub>AS</sub> = 0.50 Amps, L = 60 mH
I <sub>AR</sub> Repetitive Avalanche Current (Per Leg)	0.50	A	Current decaying linearly to zero in 1 µsec Frequency limited by T <sub>J</sub> max. V <sub>A</sub> = 1.5 x V <sub>R</sub> typical

## Electrical Specifications

Parameters	30CPQ...	Units	Conditions
V <sub>FM</sub> Max. Forward Voltage Drop (Per Leg) * See Fig. 1 (1)	0.86	V	@ 15A
	1.05	V	@ 30A
	0.67	V	@ 15A
	0.81	V	@ 30A
I <sub>RM</sub> Max. Reverse Leakage Current (Per Leg) * See Fig. 2 (1)	0.55	mA	T <sub>J</sub> = 25°C
	7	mA	T <sub>J</sub> = 125°C
C <sub>T</sub> Max. Junction Capacitance (Per Leg)	500	pF	V <sub>R</sub> = 5V <sub>DC</sub> , (test signal range 100Khz to 1Mhz) 25°C
L <sub>S</sub> Typical Series Inductance (Per Leg)	7.5	nH	Measured lead to lead 5mm from package body
dv/dt Max. Voltage Rate of Change	10000	V/µs	(Rated V <sub>R</sub> )

(1) Pulse Width &lt; 300µs, Duty Cycle &lt;2%

## Thermal-Mechanical Specifications

Parameters	30CPQ...	Units	Conditions
T <sub>J</sub> Max. Junction Temperature Range	-55 to 175	°C	
T <sub>stg</sub> Max. Storage Temperature Range	-55 to 175	°C	
R <sub>thJC</sub> Max. Thermal Resistance Junction to Case (Per Leg)	2.20	°C/W	DC operation * See Fig. 4
R <sub>thJC</sub> Max. Thermal Resistance Junction to Case (Per Package)	1.10	°C/W	DC operation
R <sub>thCS</sub> Typical Thermal Resistance, Case to Heatsink	0.24	°C/W	Mounting surface, smooth and greased
wt Approximate Weight	6 (0.21)	g (oz.)	
T Mounting Torque	Min. 6 (5)	Kg-cm (lbf-in)	Non-lubricated threads
	Max. 12 (10)		
Case Style	TO-247AC(TO-3P)	JEDEC	
Device Marking	30CPQ080		
	30CPQ100		

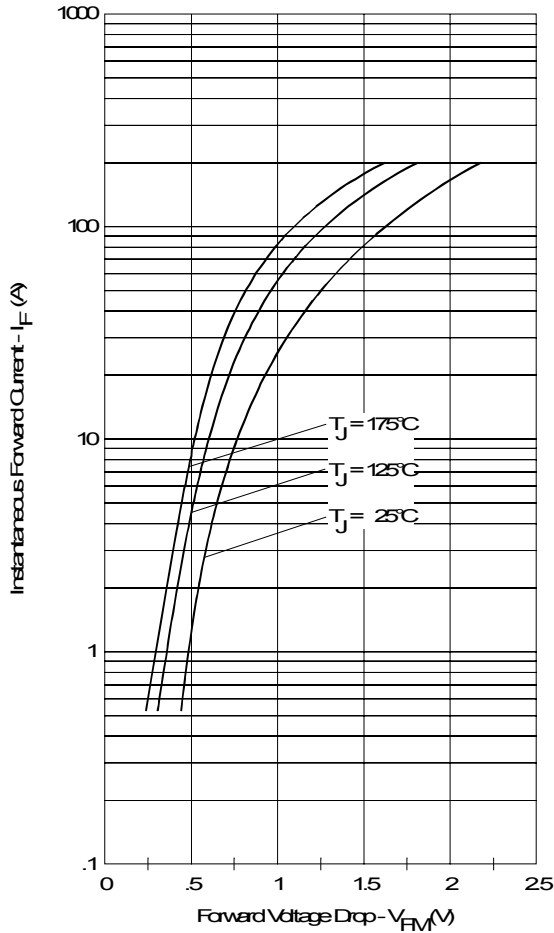


Fig. 1 - Max. Forward Voltage Drop Characteristics (Per Leg)

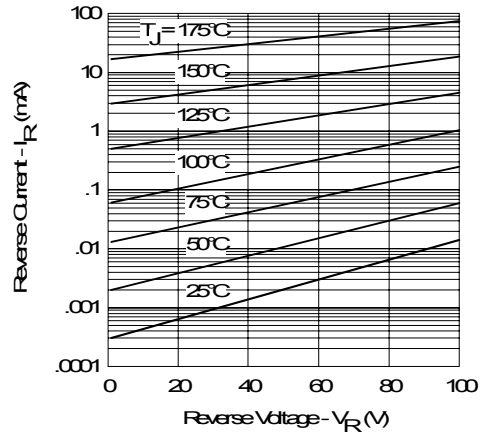


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage (Per Leg)

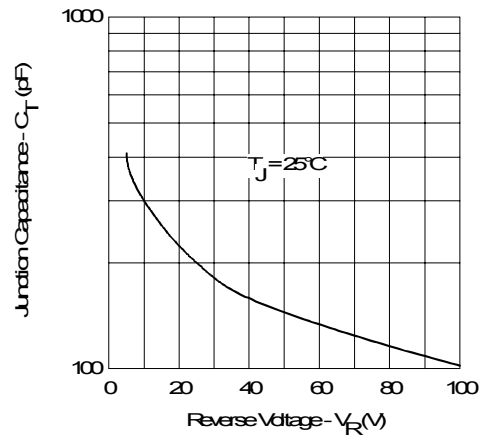


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage (Per Leg)

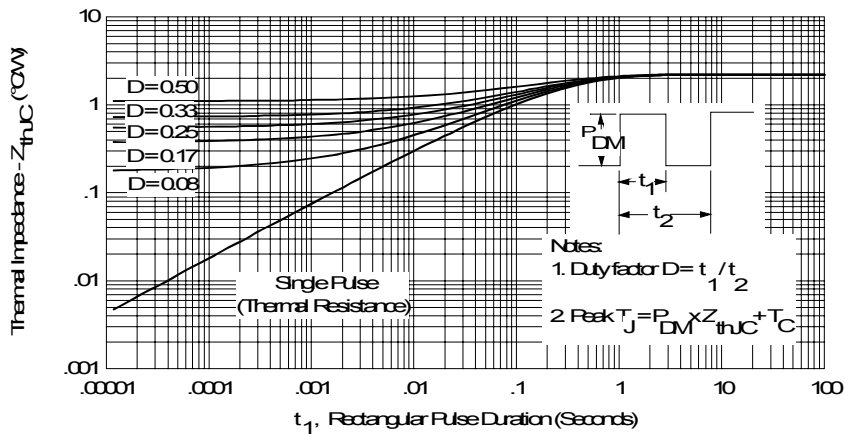


Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics (Per Leg)

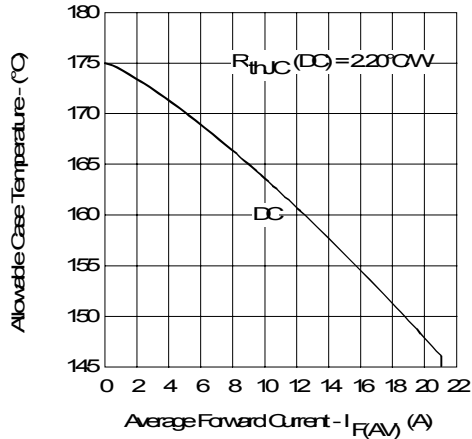


Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current (Per Leg)

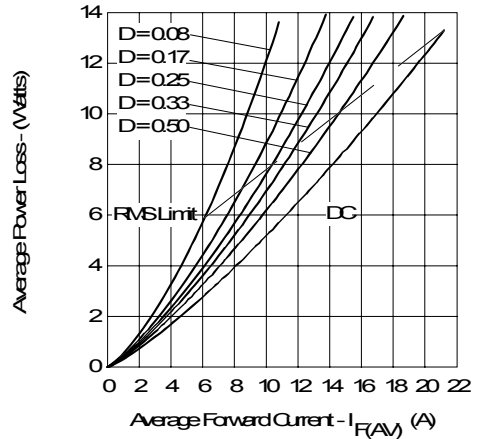


Fig. 6 - Forward Power Loss Characteristics (Per Leg)

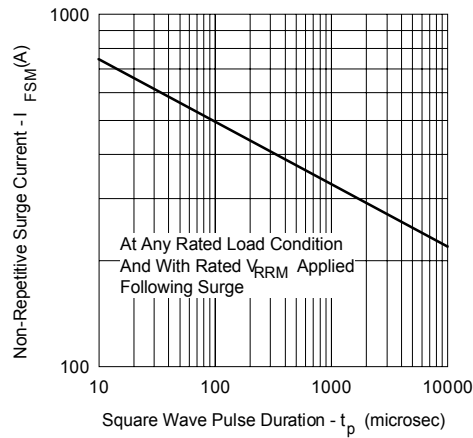


Fig. 7 - Max. Non-Repetitive Surge Current (Per Leg)


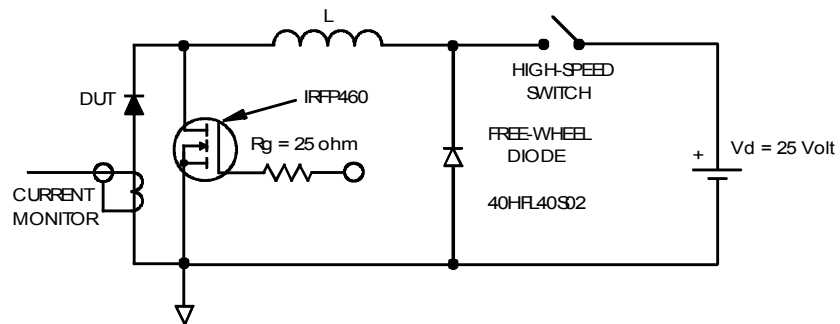


Fig. 8 - Unclamped Inductive Test Circuit

Outline Table



Marking Information

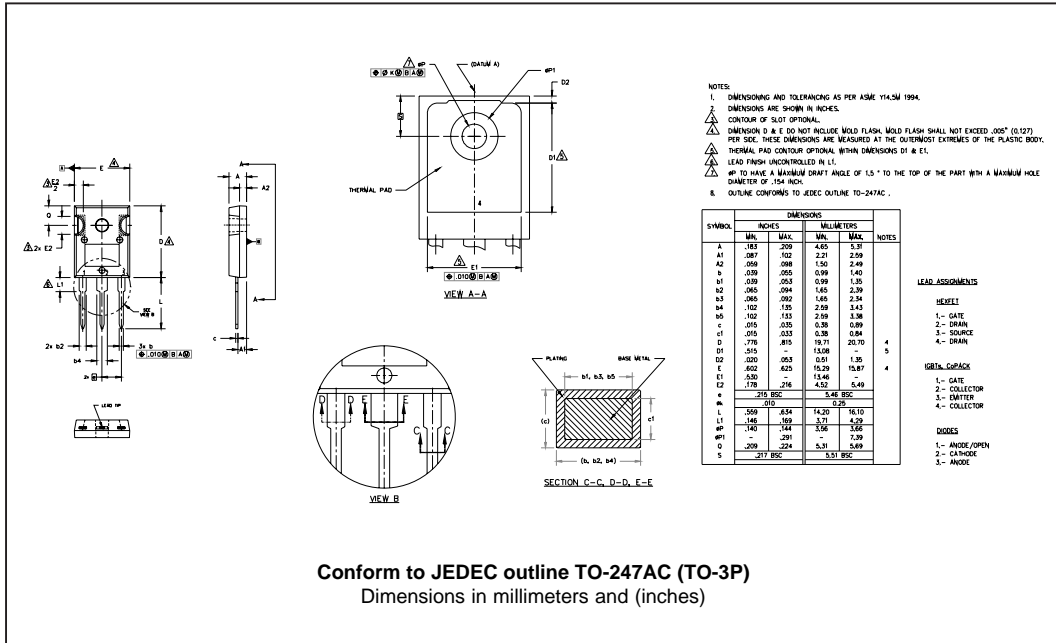