



| | |
|----------------------------------|---|
| Order Code | TCK-185 |
| Inductance (each winding) | 415 μ H \pm 35% (at 100 kHz / 100 mV) |
| Impedance (DCR) | 5 m Ω max. |
| Rated Current | 16 A max. |
| Operating Temperature | -40°C to +125°C |
| RoHS Exemptions | No Exemptions |

Impedance Curve

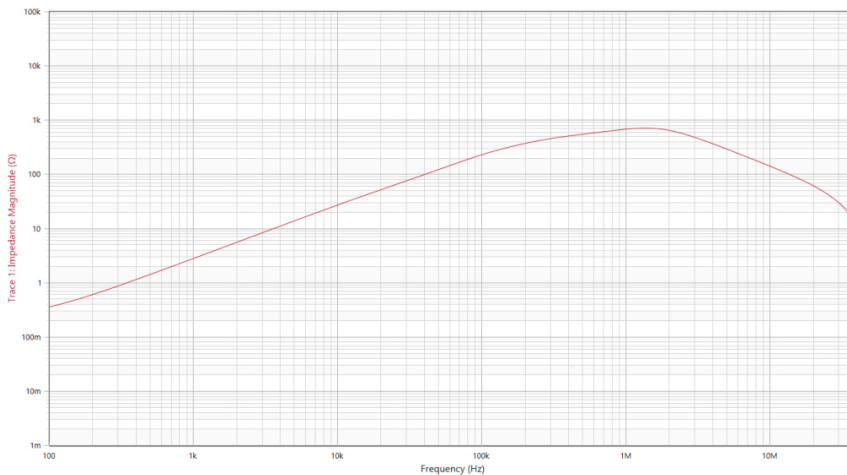

Outline Dimensions

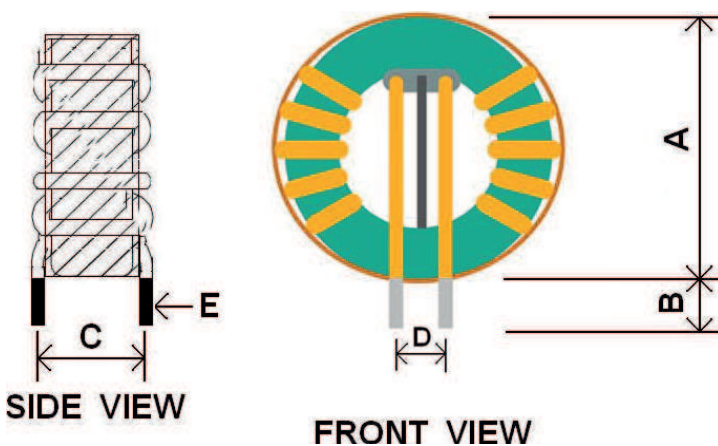

| Dimensions [mm] | |
|-----------------|---------------------------|
| A | 14.45 max. |
| B | 5.0 \pm 2 |
| C | 10.0 \pm 1 |
| D | 4.0 \pm 1 |
| E | \varnothing 1.0 \pm 1 |

All specifications valid at +25°C, unless otherwise stated.