


AMERICAN MICROSEMICONDUCTOR INC.

P. O. Box 104
 Madison, New Jersey 07940 U. S. A.
<http://www.americanmicrosemi.com>
 email:sales@americanmicrosemi.com

Phone: (973) 377-9566 Fax: (973) 377-3078

ADA1108P

Switching Diode Array



FEATURES

- 8 Diode Array
- Standard 16 pin Dual-In-Line Package
- UL 94V-0 Flammability Classification

MECHANICAL

- Molded 16 Pin Dip
- Weight: 1.026 grams (approximate)
- Marking: Logo, device number, date code
- Pin #1 defined by DOT on top of package

MAXIMUM RATINGS


- Operating Temperatures: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Forward Surge Current: 2.0 Amps (8.3 mS)
- Minimum Breakdown Voltage $V_{(BR)}$: 90V
- Working Peak Reverse Voltage V_{RWM} : 75V
- Continuous forward current I_F : 400 mA
- Power dissipation (P_D): 500 mW
- Derating factor: 4.0 mW/°C

DataSheet4U.com

PACKAGING

- Carrier tube 25 pcs per (STANDARD)

CIRCUIT DIAGRAM

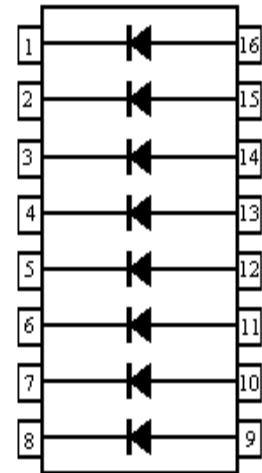

DataSheet4U.com

ELECTRICAL CHARACTERISTICS @ 25°C Unless otherwise specified

Part Number	$V_{(BR)}$ @100 μ A V	V_{RWM} V	I_R +25°C μ A		I_R +150°C μ A		CAP @0V pF	t_{rr} (nS)	V_F @ $I_f =$ 10mA	V_F @ $I_f =$ 100mA
	MIN	MAX	MAX	@ V_R	MAX	@ V_R	MAX	MAX	MAX	MAX
ADA1108P	90	75	.100	20	50	20	4.0	5.0	1.00	1.20

