

Elastische Einpresszone 3.0 mm / compliant pressfit zone 3.0 mm

Isolierwerkstoff / housing material : PBT GF30

Bauart 2 / type 2

Anforderungsstufe 1 = 500 Steckzyklen / performance class 1 = 500 mating cycles

Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2


Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2

Schichtaufbau im metallisierten Loch siehe Zeichnung 114124 und 164062 Nr. 6

diameter of drilled hole see drawing 114124 and 164062 No. 6


Bestückungsplan / contact layout

■ bestückt / assemble

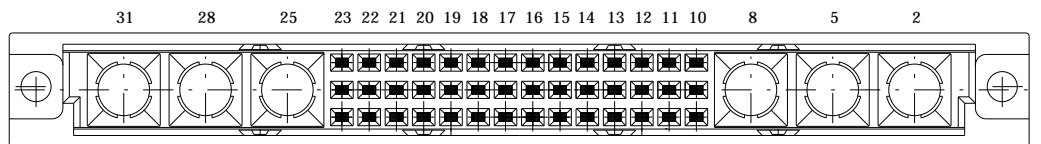

- $\phi 1.0 \begin{smallmatrix} +0.09 \\ -0.06 \end{smallmatrix}$  Durchmesser des metallisierten Loches  
 $\phi 1.0 \begin{smallmatrix} +0.09 \\ -0.06 \end{smallmatrix}$  Diameter of finished plated-through hole  
 $\phi 1.15 \pm 0.025$  Bohrungsdurchmesser des Loches  
 $\phi 1.15 \pm 0.025$  Diameter of drilled hole

Leiterplatten-Lochbild / PCB drillhole pattern

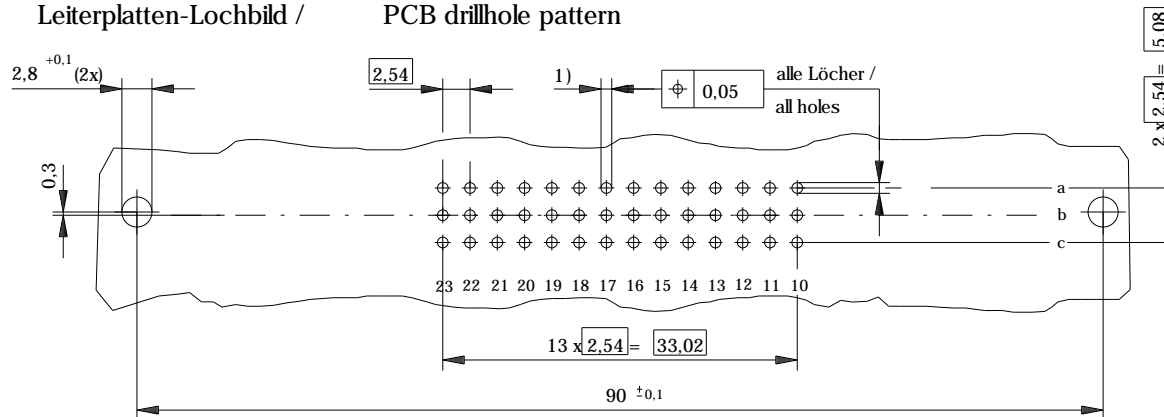

Information:		Tolerances		Scale	2:1
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.		Subject to modification without prior notice. Drawing will not be updated.		Designation	
		www.ERNI.com		Federleiste M 42-6 EE Fem. Connector M 42-6 Pressfit	
a	10.05.2006			593802	
Index	Date	H:00057895.SZA		1	
				STV M	