

2.5 Gb/s Transponder with Mux/Demux (1310 and 1550 nm) 54TR Series



Key Features

- MSA compatible
- Modular size for plug-and-play, allowing faster time-to-market for LR-1 and LR-2 applications
- Outstanding optical and electrical performance over both commercial and industrial temperatures

Applications

- 1310nm and 1550 Long Reach applications
- Metro core
- Wide area networks
- Optical crossconnects
- Fiber backbone

Compliance

- Telcordia GR-253-CORE
- ITU-T G.783, ITU-T G.957, and ITU-T G.958

The JDSU 54TR series transponder integrates optics and electronics in an OC-48 (2.5 Gb/s) time division multiplexing (TDM) transponder module. Multisource agreement (MSA) compatible and designed for operation at 1310 and 1550 nm, it can be used across a variety of optical fiber systems.


The bidirectional modules provide a SONET or SDH compliant interface between the SONET/SDH photonic physical layer and the electrical layer. Major components include distributed feedback (DFB) based optical transmitter; an Avalanche photodiode (APD) optical receiver with transimpedance amplifier (TIA); a microcontroller; a laser driver; and an integrated 16 signal mux/demux with clock and data recovery (CDR) circuitry.

The transponder provides either 1310 or 1550 nm wavelengths and is available in an APD receiver configuration. It receives a 2488.32 Mb/s optical signal, converts it to an electrical signal, recovers the clock, and demultiplexes the data into sixteen 155 Mb/s differential low voltage positive emitter coupled logic (LVPECL) data signals. The transponder is available in LR-1 or LR-2 configurations.

2

Dimensions Diagram

(Specifications in inches unless otherwise noted.)

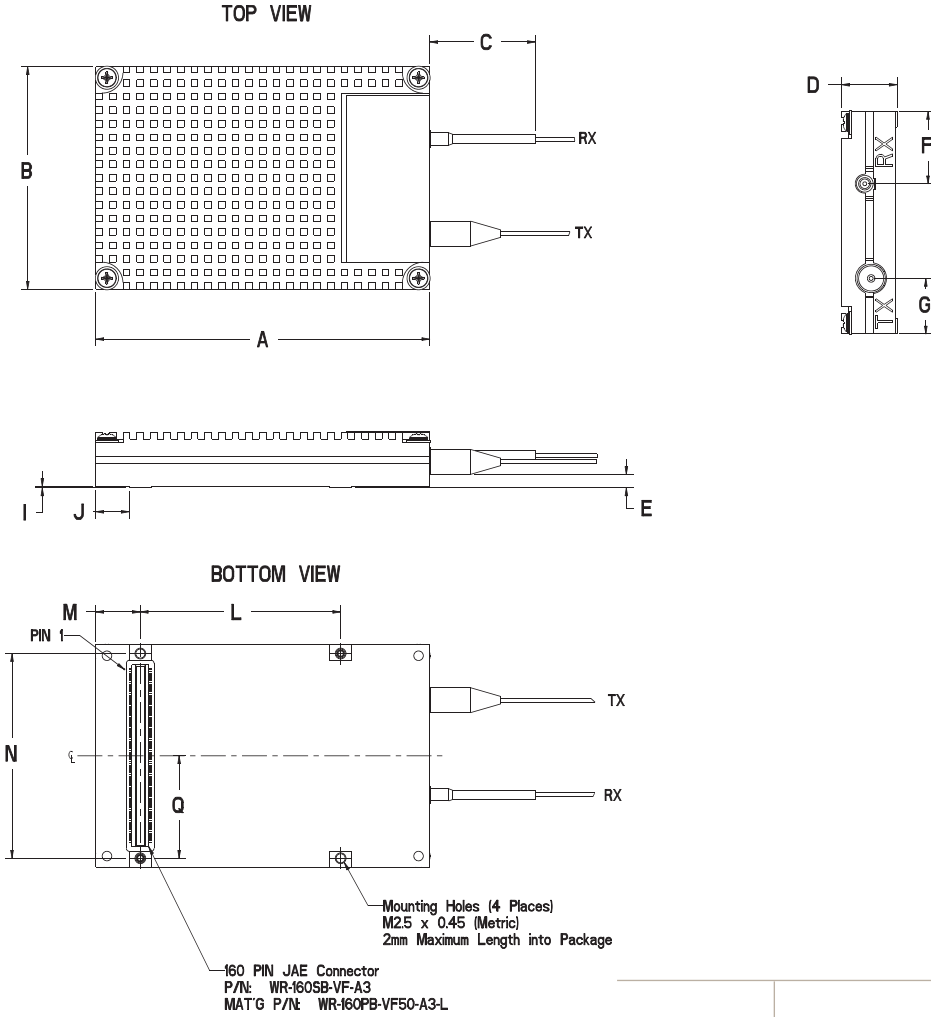

Dimension	Minimum	Nominal	Maximum
A	2.995	3.000	3.040
B	1.995	2.000	2.040
C	0.65	0.90	1.0
D	0.483	0.494	0.517
E	0.100	0.122	0.132
F	0.610	0.650	0.690
G	0.460	0.500	0.540
I	0.015	0.015	0.020
J	0.300	0.305	0.310
L	1.786	1.800	1.814
M	0.386	0.400	0.414
N	1.826	1.840	1.854
Q	0.906	0.920	0.934

3

Absolute Maximum Ratings¹

Parameter	Minimum	Maximum
Standard operating case temperature range	-5 °C	70 °C
Extended operating case temperature range	-40 °C	80 °C
Storage case temperature range	-40 °C	85 °C
Supply voltage	-0.5 V	4.0 V
Operating relative humidity (non-condensing)	5%	85%
Operating short-term relative humidity ^{2,3}	5%	90%
Receiver optical input power for APD	-	-3 dBm

1. Limiting values apply to the 54TR within entire operating range unless otherwise specified.
2. Short-term refers to a period of not more than 72 consecutive hours and a total of not more than 15 days in one year. (This refers to a total of 360 hours in any given year, but no more than 15 occurrences during that one-year period.)
3. Not to exceed 0.024 lbs. of water/lb. of dry air.

4

Optical Specifications (note ¹)		Long reach/long haul (DFB laser, APD receiver) 1310 nm		
Parameter	Minimum	Typical	Maximum	
Average output power (note ²) (BOL)	0 dBm	1 dBm	1.5 dBm	
Average output power (note ²) (EOL)	-2 dBm	0 dBm	1.5 dBm	
Operating wavelength	1280 nm	1310 nm	1335 nm	
Extinction ratio (note ³) (BOL)	9.5 dB	10.0 dB	10.5 dB	
Extinction ratio (note ³) (EOL)	8.2 dB	-	-	
Optical rise and fall times	-	-	200 ps	
Eye mask of optical output (note ^{4,5})	Compliant with GR-253 and ITU-T G.957			
Jitter generation (peak-to-peak)	-	-	85 mUI	
Jitter generation (rms)	-	-	8 mUI	
Average receiver sensitivity (note ^{6,7}) (BOL, BER = 1 x 10 ⁻¹²)	-30 dBm	-31 dBm	-	
Average receiver sensitivity (note ^{6,7}) (EOL, BER = 1 x 10 ⁻¹²)	-29 dBm	-	-	
Maximum received optical power	-8 dBm	-	-	
Dispersion	-	-	250 ps/nm	
Optical path penalty (at 60 km)	-	0.2 dB	1.0 dB	
Jitter tolerance and jitter transfer	Compliant with GR-253 and ITU-T G.958			
BER floor	-	-	10 ⁻¹⁵	

Optical Specifications (note ¹)		Long reach/long haul 1550 nm (DFB laser, APD receiver)		
Parameter	Minimum	Typical	Maximum	
Average output power (note ²) (BOL)	-0.5 dBm	1 dBm	2 dBm	
Average output power (note ²) (EOL)	-2 dBm	1 dBm	3 dBm	
Operating wavelength	1500 nm	1550 nm	1580 nm	
Extinction ratio (note ³) (BOL)	9.0 dB	9.7 dB	10.5 dB	
Extinction ratio (note ³) (EOL)	8.2 dB	-	-	
Eye mask of optical output (note ^{4,5})	Compliant with GR-253 and ITU-T G.957			
Jitter generation (peak-to-peak)	-	-	85 mUI	
Jitter generation (rms)	-	-	8 mUI	
Average receiver sensitivity (note ^{6,7}) (BOL, BER = 1x10 ⁻¹²)	-30 dBm	-31 dBm	-	
Average receiver sensitivity (note ^{6,7}) (EOL, BER = 1x10 ⁻¹²)	-29 dBm	-	-	
Maximum received optical power	-8 dBm	-	-	
Dispersion	-	-	1600 ps/nm	
Optical path penalty (at 98 km, dispersion = 1600 ps/nm)	-	1.3 dB	2.0 dB	
Jitter tolerance and jitter transfer	Compliant with GR-253 and ITU-T G.783			
BER floor	-	-	10 ⁻¹⁵	

1. The following optical values apply to the 54TR within entire operating range unless otherwise specified.
2. Output power definitions and measurements per ITU-T recommendation G.957.
3. Ratio of logic 1 output power to logic 0 output power under fully modulated conditions.
4. GR-253-CORE, synchronous optical network (SONET) transport systems: common generic criteria.
5. ITU-T recommendation G.957, optical interfaces for equipment and systems relating to the synchronous digital hierarchy.
6. At 1x10⁻¹² BER, 2²³⁻¹ pseudo-random data input, and an extinction ratio of 10 dB.
7. For the extended temperature version, the BOL and EOL receiver sensitivity is reduced by 1 dB from -5 to -40 °C.

Ordering Information

For more information on this or other products and their availability, please contact your local JDSU account manager or JDSU directly at 1-800-498-JDSU (5378) in North America and +800-5378-JDSU worldwide or via e-mail at customer.service@jdsu.com.

Sample: 54TR-21114

54TR- <input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>		<input type="checkbox"/>	
Code	Wavelength Option	Code	Connector Type	Code	Temperature Range	Code	Optical Reach	Code	IPDMON Maximum Current Output
2	1310 nm	1	SC/SPC	1	Standard, -5 to 70 °C	1	Long reach	0	Not required
3	1550 nm	2	ST/SPC	2	Extended, -40 to 80 °C			1	1 mA
		3	LC/SPC	3	Intermediate, -5 to 75 °C			2	2 mA
		4	FC/SPC					3	3 mA
		5	MU/SPC					4	4 mA

Telcordia is a registered trademark of Telcordia Technologies Incorporated.

All statements, technical information and recommendations related to the products herein are based upon information believed to be reliable or accurate. However, the accuracy or completeness thereof is not guaranteed, and no responsibility is assumed for any inaccuracies. The user assumes all risks and liability whatsoever in connection with the use of a product or its application. JDSU reserves the right to change at any time without notice the design, specifications, function, fit or form of its products described herein, including withdrawal at any time of a product offered for sale herein. JDSU makes no representations that the products herein are free from any intellectual property claims of others. Please contact JDSU for more information. JDSU and the JDSU logo are trademarks of JDS Uniphase Corporation. Other trademarks are the property of their respective holders. ©2006 JDS Uniphase Corporation. All rights reserved. 10116510 Rev.003 54TR.DS.CMS.AE