


# FS25SM-10A

HIGH-SPEED SWITCHING USE


**FS25SM-10A**

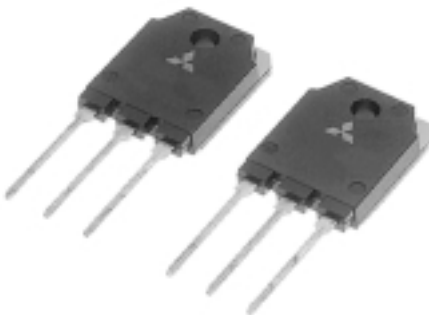

- 10V DRIVE
- $V_{DSS}$  ..... 500V
- $r_{DS(ON)}(MAX)$  ..... 0.20 $\Omega$
- $I_D$  ..... 25A

**OUTLINE DRAWING**

Dimensions in mm

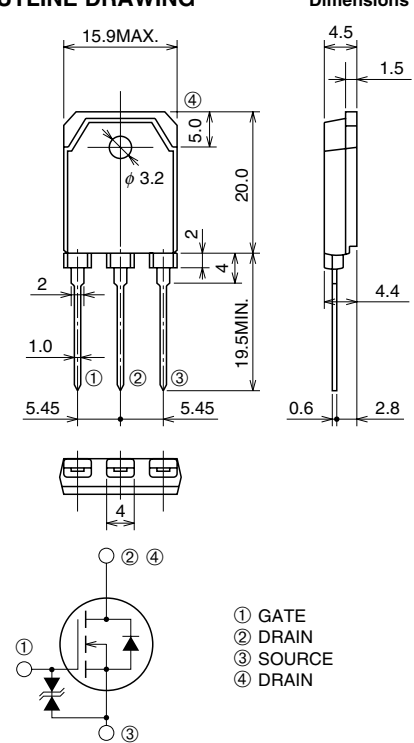

① GATE  
② DRAIN  
③ SOURCE  
④ DRAIN

**TO-3P**

## APPLICATION

SMPS, AC-adapter, Power supply of Printer, Copier, TV, VCR. etc.





## MAXIMUM RATINGS (Tc = 25°C)

Symbol	Parameter	Conditions	Ratings	Unit
$V_{DSS}$	Drain-source voltage	$V_{GS} = 0V$	500	V
$V_{GSS}$	Gate-source voltage	$V_{DS} = 0V$	$\pm 30$	V
$I_D$	Drain current		25	A
$I_{DM}$	Drain current (Pulsed)		75	A
$I_{DA}$	Avalanche drain current (Pulsed)	$L = 200\mu H$	25	A
$P_D$	Maximum power dissipation		200	W
$T_{ch}$	Channel temperature		-55 ~ +150	°C
$T_{stg}$	Storage temperature		-55 ~ +150	°C
—	Weight	Typical value	4.8	g

**ELECTRICAL CHARACTERISTICS** (T<sub>ch</sub> = 25°C)







Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
V (BR) DSS	Drain-source breakdown voltage	I <sub>D</sub> = 1mA, V <sub>GS</sub> = 0V	500	—	—	V
V (BR) GSS	Gate-source breakdown voltage	I <sub>G</sub> = ±100μA, V <sub>DS</sub> = 0V	±30	—	—	V
I <sub>GSS</sub>	Gate-source leakage current	V <sub>GS</sub> = ±25V, V <sub>DS</sub> = 0V	—	—	±10	μA
I <sub>DSS</sub>	Drain-source leakage current	V <sub>DS</sub> = 500V, V <sub>GS</sub> = 0V	—	—	1	mA
V <sub>GS</sub> (th)	Gate-source threshold voltage	I <sub>D</sub> = 1mA, V <sub>DS</sub> = 10V	2.5	3.0	3.5	V
r <sub>DS</sub> (ON)	Drain-source on-state resistance	I <sub>D</sub> = 12A, V <sub>GS</sub> = 10V	—	0.15	0.20	Ω
V <sub>DS</sub> (ON)	Drain-source on-state voltage	I <sub>D</sub> = 12A, V <sub>GS</sub> = 10V	—	1.80	2.40	V
y <sub>fs</sub>	Forward transfer admittance	I <sub>D</sub> = 12A, V <sub>DS</sub> = 10V	15.0	25.0	—	S
C <sub>iss</sub>	Input capacitance	V <sub>DS</sub> = 25V, V <sub>GS</sub> = 0V, f = 1MHz	—	4600	—	pF
C <sub>oss</sub>	Output capacitance		—	460	—	pF
C <sub>rss</sub>	Reverse transfer capacitance		—	100	—	pF
t <sub>d</sub> (on)	Turn-on delay time	V <sub>DD</sub> = 200V, I <sub>D</sub> = 12A, V <sub>GS</sub> = 10V, R <sub>GEN</sub> = R <sub>GS</sub> = 50Ω	—	60	—	ns
t <sub>r</sub>	Rise time		—	100	—	ns
t <sub>d</sub> (off)	Turn-off delay time		—	630	—	ns
t <sub>f</sub>	Fall time		—	140	—	ns
V <sub>SD</sub>	Source-drain voltage	I <sub>S</sub> = 12A, V <sub>GS</sub> = 0V	—	1.5	2.0	V
R <sub>th</sub> (ch-c)	Thermal resistance	Channel to case	—	—	0.625	°C/W

**PERFORMANCE CURVES**

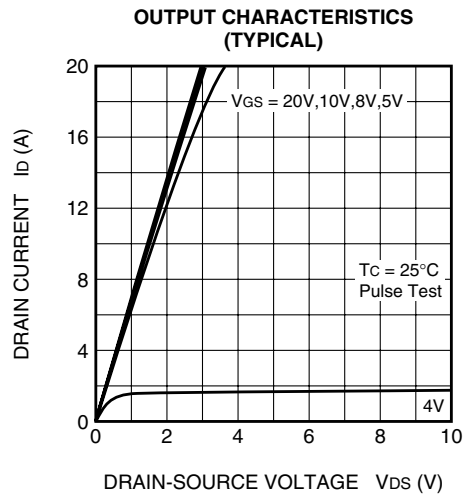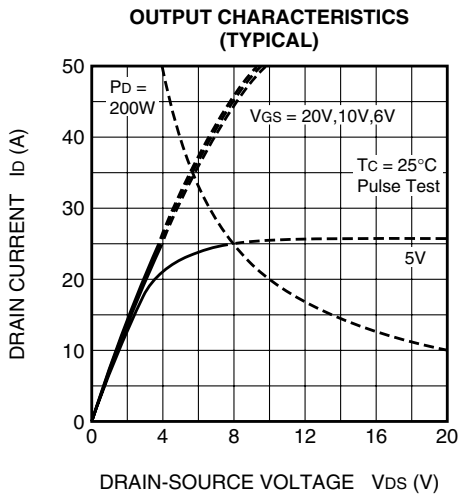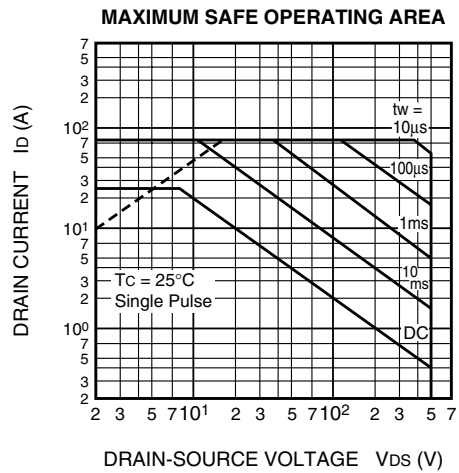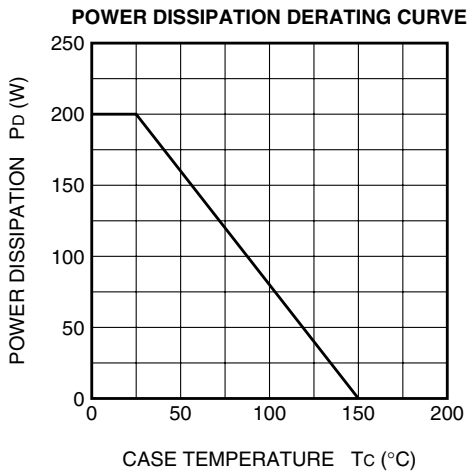


# FS25SM-10A


HIGH-SPEED SWITCHING USE

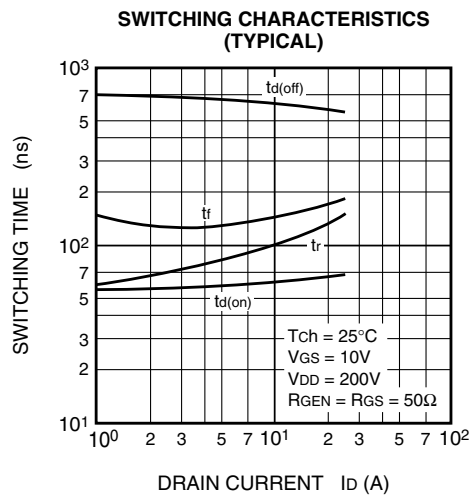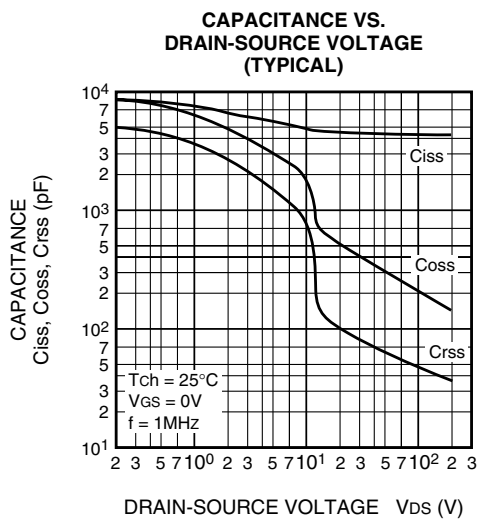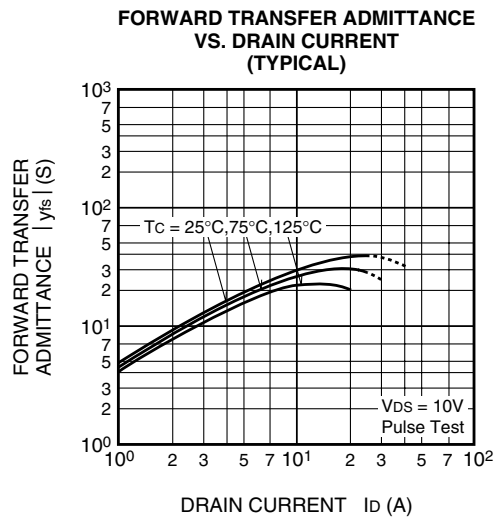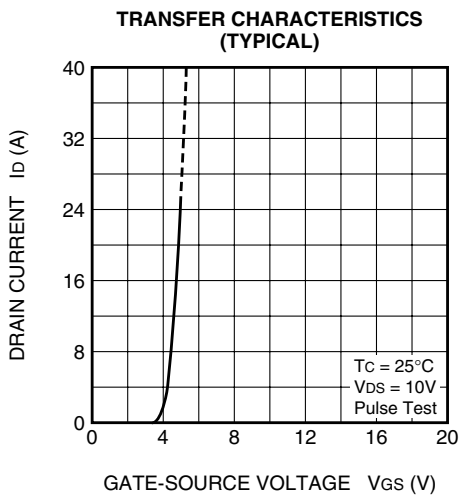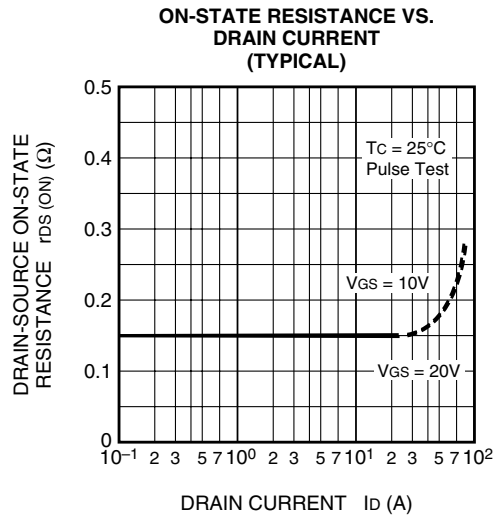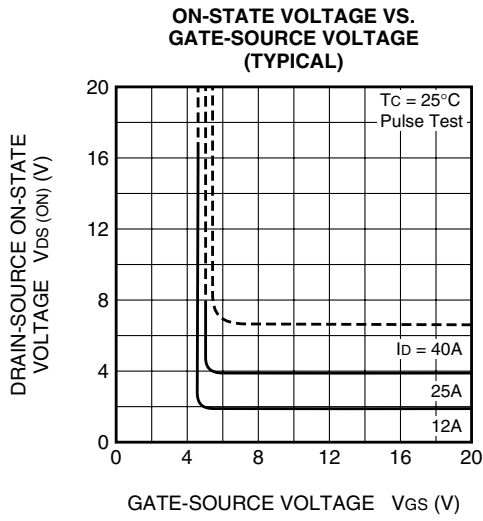


GATE-SOURCE VOLTAGE VS. GATE CHARGE (TYPICAL)

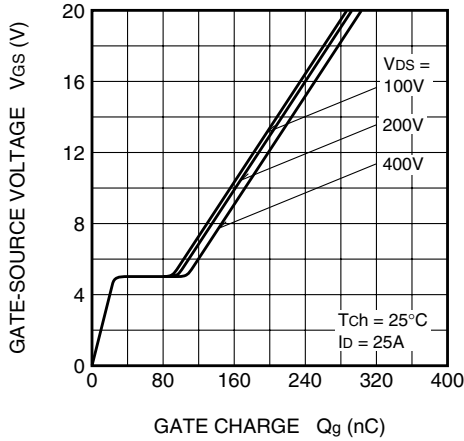


SOURCE-DRAIN DIODE FORWARD CHARACTERISTICS (TYPICAL)

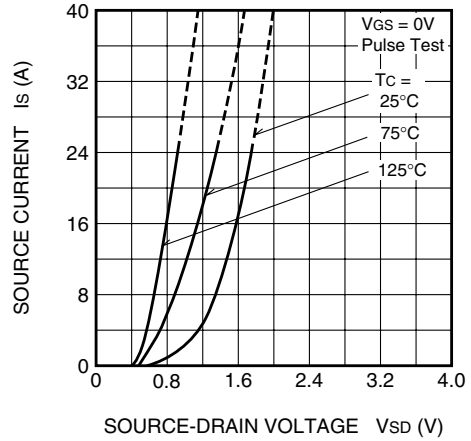


ON-STATE RESISTANCE VS. CHANNEL TEMPERATURE (TYPICAL)

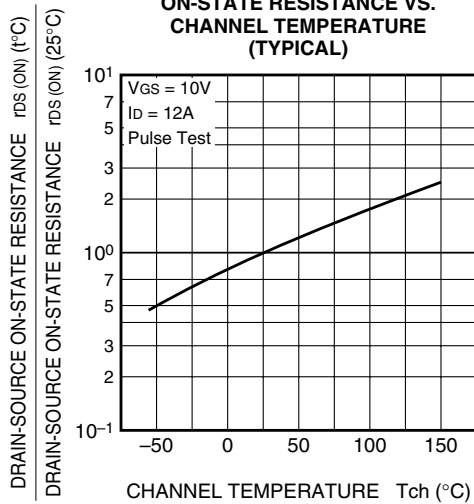

THRESHOLD VOLTAGE VS. CHANNEL TEMPERATURE (TYPICAL)

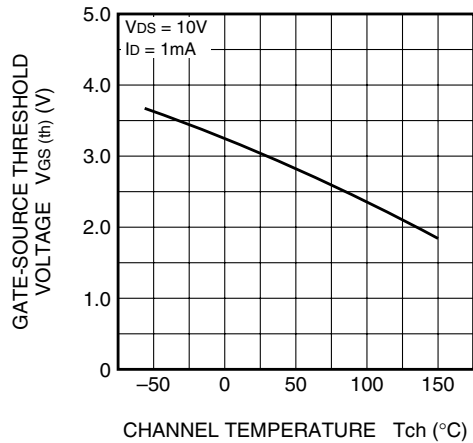

BREAKDOWN VOLTAGE VS. CHANNEL TEMPERATURE (TYPICAL)

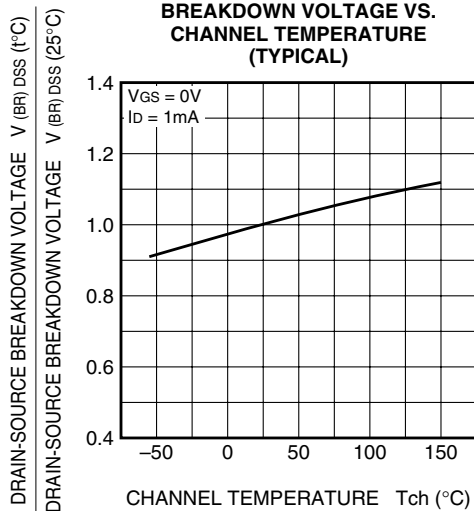

TRANSIENT THERMAL IMPEDANCE CHARACTERISTICS

