

Mini USB Hub CKM-E25 Series

FEATURES

1. Achieving a thinness of 11mm allows this connector to be used in ultra-thin, ultra-small packages.
2. 4 downstream ports are provided.
3. Complies with USB Spec. Rev. 1.1.
4. Bus power specifications.



HOW TO ORDER

E25-004-8665 - □
 1 2 3

- 1 Series No.
- 2 Number of downstream ports (004 : 4 ports)
- 3 Running No. assigned by us

SPECIFICATIONS


ELECTRICAL CHARACTERISTICS & MECHANICAL CHARACTERISTICS

Rated Voltage	5V/500mA
Supported Standards	USB Spec. Rev. 1.1
Downstream Port	4 Ports
Upstream Port	1 Port
Power Supply Method	Bus powered (supplied from the PC or front hub)
Current that can be supplied	100mA/Port
Weight	30g

MATERIAL & FINISH

Component Parts	Material	Finish
Case	ABS resin	—
Label	Polycarbonate (Separate support possible)	—

DIMENSIONS

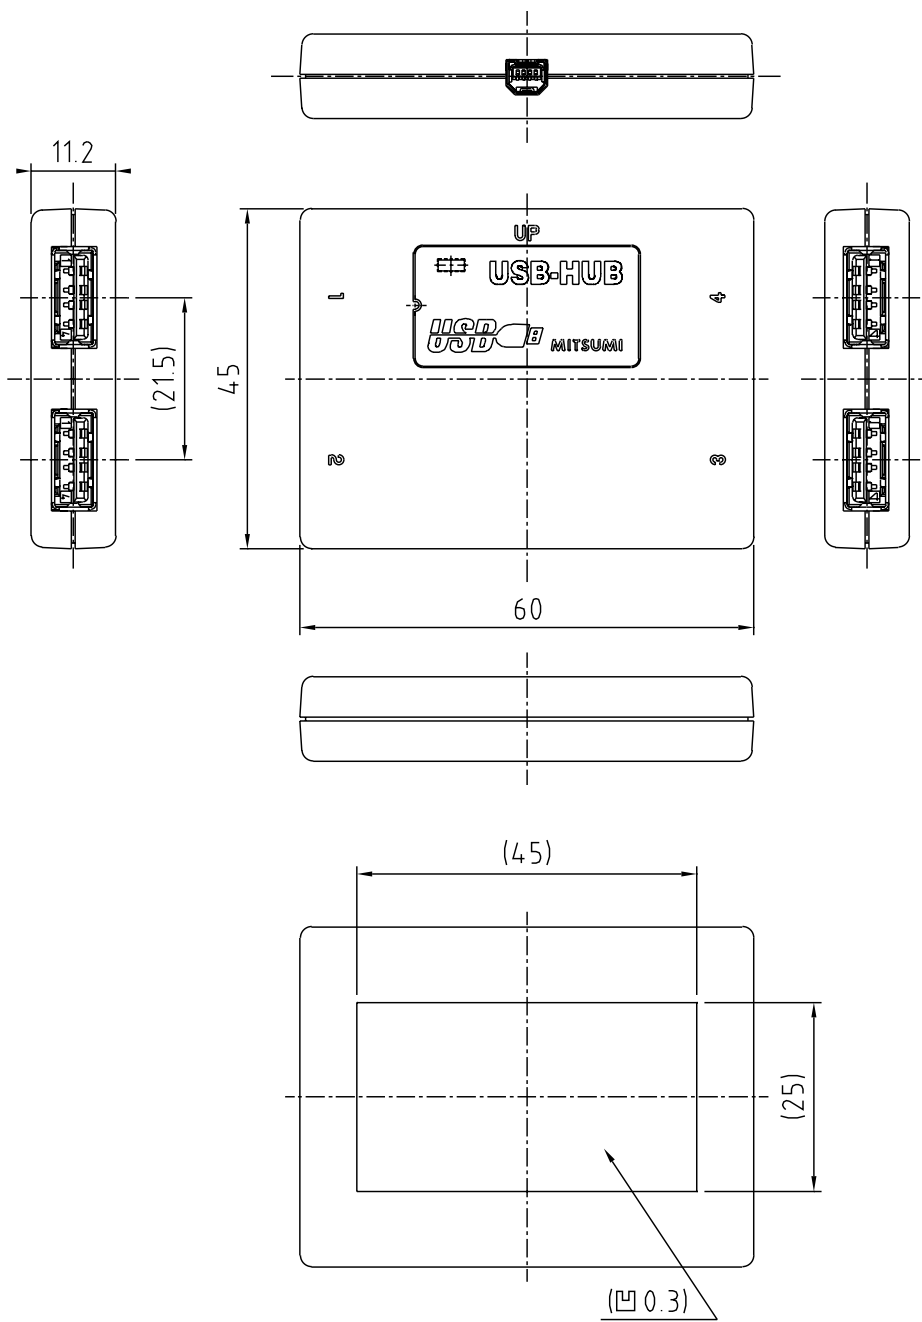

Unit : mm