

## Nanopower 600 nA, rail-to-rail, 5 V cost-effective Op Amp



TSL6801



TSL6801



TSL6802



TSL6804

### Features

- Supply current 600 nA typ.
- Low supply voltage: 1.5 V - 5.5 V
- Unity gain stable
- Rail-to-rail input and output
- Gain bandwidth product: 8 kHz typ.
- Low input bias current: 5 pA max. at 25 °C
- Industrial temperature range: -40 °C to 85 °C

### Applications

- Cost-sensitive applications
- Battery-powered products

### Description

The TSL6801, TSL6802 and the TSL6804 are single, dual and quad 8 kHz-bandwidth unity-gain-stable amplifiers. The rail-to-rail input stage and the wide supply range from 2.5 V to 5.5 V make the TSL680x ideal for low voltage signal conditioning.

#### Product status link

SC70-5	TSL6801
SOT23-5	TSL6801
MiniSO8	TSL6802
TSSOP14	TSL6804

#### Related products

For higher bandwidth (1 MHz)	TSL6001
For higher bandwidth (10 MHz)	TSL6201

# 1 Pin description

## 1.1 TSL6801 single operational amplifier

Figure 1. SC70-5 and SOT23-5 pin connections (top view)

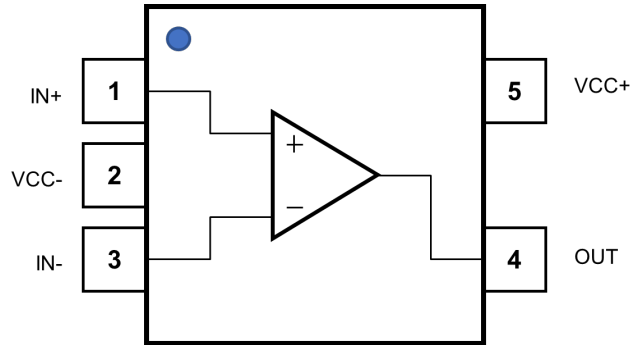


Table 1. SC70-5 and SOT23-5 pin description

Pin	Pin name	Description
1	IN+	Non-inverting input channel
2	VCC-	Negative supply voltage
3	IN-	Inverting input channel
4	OUT	Output channel
5	VCC+	Positive supply voltage

Prerelease product(s)

## 1.2 TSL6802 dual operational amplifier

Figure 2. MiniSO8 pin connection (top view)

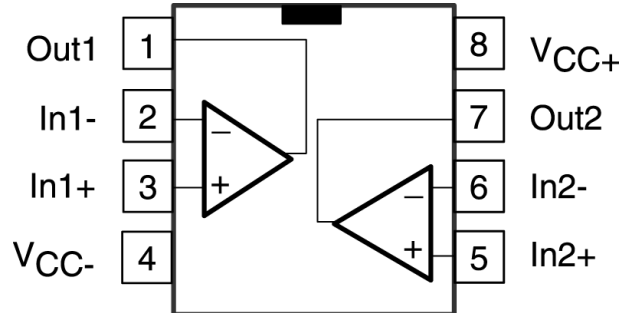


Table 2. MiniSO8 pin description

Pin	Pin name	Description
1	OUT1	Output channel 1
2	IN1-	Inverting input channel 1
3	IN1+	Non-inverting input channel 1
4	VCC-	Negative supply voltage
5	IN2+	Non-inverting input channel 2
6	IN2-	Inverting input channel 2
7	OUT2	Output channel 2
8	VCC+	Positive supply voltage

### 1.3 TSL6804 quad operational amplifier

Figure 3. TSSOP-14 pin connections (top view)

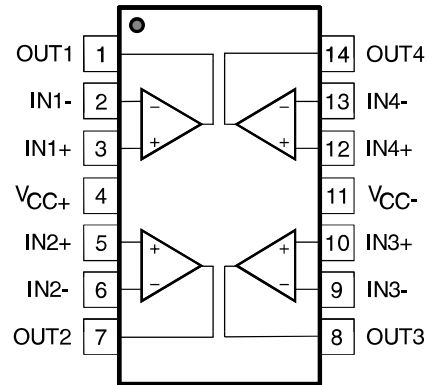


Table 3. TSSOP-14 pin description

Pin	Pin name	Description
1	OUT1	Output channel 1
2	IN1-	Inverting input channel 1
3	IN1+	Non-inverting input channel 1
4	VCC+	Positive supply voltage
5	IN2+	Non-inverting input channel 2
6	IN2-	Inverting input channel 2
7	OUT2	Output channel 2
8	OUT3	Output channel 3
9	IN3-	Inverting input channel 3
10	IN3+	Non-inverting input channel 3
11	VCC-	Negative supply voltage
12	IN4+	Non-inverting input channel 4
13	IN4-	Inverting input channel 4
14	OUT4	Output channel 4

## 2 Absolute maximum ratings

Table 4. Absolute maximum ratings

Symbol	Parameter <sup>(1)</sup>	Value	Unit
V <sub>CC</sub> <sup>(1)</sup>	Supply voltage	6	V
V <sub>id</sub>	Input voltage differential (V <sub>IN+</sub> - V <sub>IN-</sub> )	±V <sub>CC</sub>	V
V <sub>in</sub> <sup>(2)</sup>	Input voltage	(V <sub>CC-</sub> ) - 0.2 to (V <sub>CC+</sub> ) + 0.2	V
I <sub>in</sub>	Input current	±10	mA
T <sub>stg</sub>	Storage temperature	-65 to +150	°C
R <sub>th-ja</sub> <sup>(3)</sup>	Thermal resistance junction-to-ambient		°C/W
	SOT23-5	250	
	MiniSO8	190	
	SC70-5	205	
	TSSOP-14	100	
T <sub>j</sub>	Maximum junction temperature	150	°C
ESD	HBM: human body model <sup>(4)</sup>	2	kV
	CDM: charged device model <sup>(5)</sup>	0.9	kV

1. All voltage values are with respect to the VCC- pin, unless otherwise specified.
2. The maximum input voltage value may be extended to the condition that the input current is limited to ±10 mA.
3. R<sub>th-ja</sub> is a typical value.
4. Human body model: HBM test according to the standard ESDA/JEDEC JS-001-2017.
5. Charged device model: the test CDM is done in according to the standard ESDA/JEDEC JS-002-2018.

Table 5. Operating conditions

Symbol	Parameter	Value
V <sub>CC</sub>	Supply voltage	1.5 to 5.5 V
V <sub>icm</sub>	Common mode input voltage range (CMR)	V <sub>CC-</sub> - 0.1 V to V <sub>CC+</sub> + 0.1 V
T <sub>oper</sub>	Operating free air temperature range	-40 °C to +85 °C

### 3 Electrical characteristics

**Table 6. Electrical characteristics at  $V_{CC} = 1.8\text{ V}$  to  $5.5\text{ V}$ ,  $V_{ICM} = V_{OUT} = V_{CC} / 2$ ,  $T = 25\text{ °C}$  and OUT connected to  $V_{CC} / 2$  through  $R_L = 10\text{ k}\Omega$  (unless otherwise specified)**

Symbol	Parameter	Conditions	Min.	Typ.	Max.	Unit
<b>DC performance</b>						
$V_{io}$	Input offset voltage			$\pm 0.1$	$\pm 3$	mV
$\Delta V_{io}/DT$	Input offset voltage temperature drift	$-40\text{ °C} \leq T \leq 85\text{ °C}$		$\pm 2$		$\mu\text{V}/\text{°C}$
$I_{ib}$	Input bias current			$\pm 1$		pA
$I_{io}$	Input offset current			$\pm 1$		pA
$A_{VD}$	Open loop gain	$V_{CC-} + 300\text{ mV} \leq V_{OUT} \leq V_{CC+} - 300\text{ mV}$ , $R_L = 100\text{ k}\Omega$	95	115		dB
CMR	Common-mode rejection ratio $20 \cdot \log(\Delta V_{io}/\Delta V_{icm})$	$V_{CC-} \leq V_{icm} \leq V_{CC+}$	60	80		dB
$V_{OH}$	High level output voltage drop ( $V_{OH} = V_{CC+} - V_{OUT}$ )				40	mV
$V_{OL}$	Low level output voltage drop ( $V_{OL} = V_{OUT}$ )				40	mV
$I_{OUT}$	Short-circuit current	$V_{CC+} = 1.8\text{ V}$		$\pm 5$		mA
		$V_{CC+} = 5\text{ V}$		$\pm 10$		
$I_{CC}$	Supply current (by operational amplifier)			0.6	1	$\mu\text{A}$
<b>AC performance</b>						
GBP	Gain bandwidth product	$C_L = 60\text{ pF}$		8		kHz
SR	Slew rate	$C_L = 60\text{ pF}$ , $A_V = 1\text{ V/V}$ , 10% to 90%		3		V/ms
$\Phi_m$	Phase margin	$C_L = 60\text{ pF}$		50		Degrees
en	Input voltage noise density	$f = 100\text{ kHz}$		240		nV/ $\sqrt{\text{Hz}}$
		$f = 1\text{ kHz}$		225		
en p-p	Input noise voltage	$0.1\text{ Hz} \leq f \leq 10\text{ Hz}$		8		$\mu\text{V}_{pp}$

## 4 Typical performance characteristics

Figure 4. Supply current vs. supply voltage

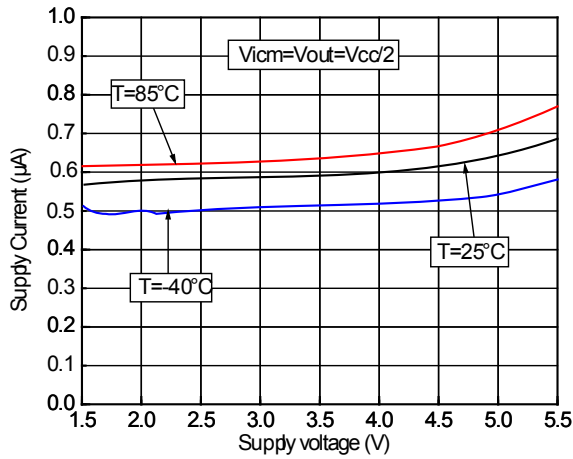


Figure 5. Input offset voltage distribution

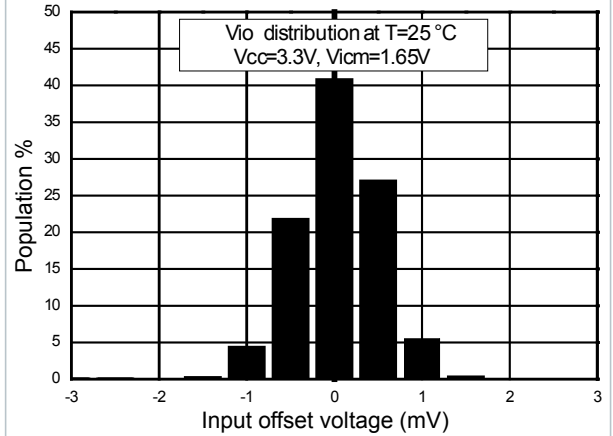


Figure 6. Input offset voltage vs. common mode voltage

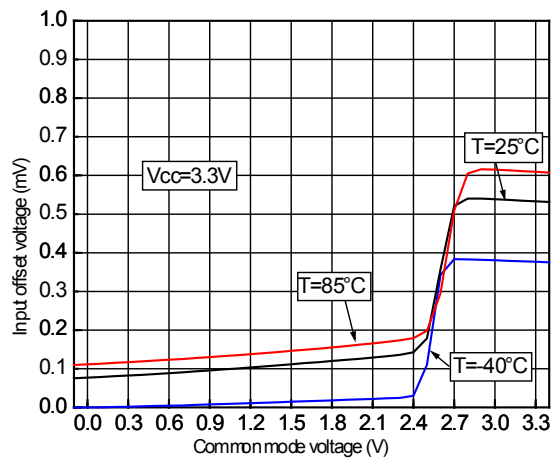


Figure 7. Input offset voltage temperature coefficient distribution

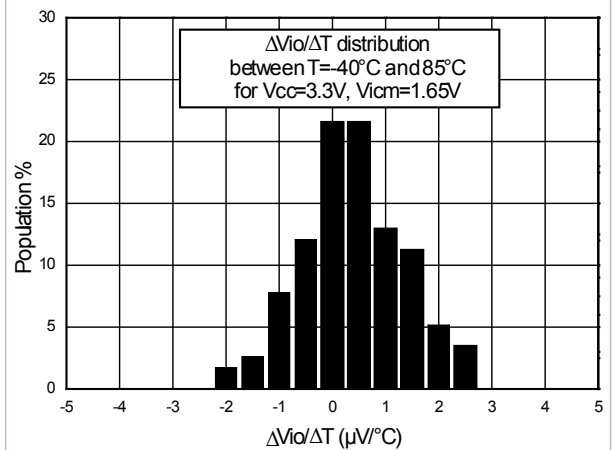


Figure 8. Input bias current vs. temperature

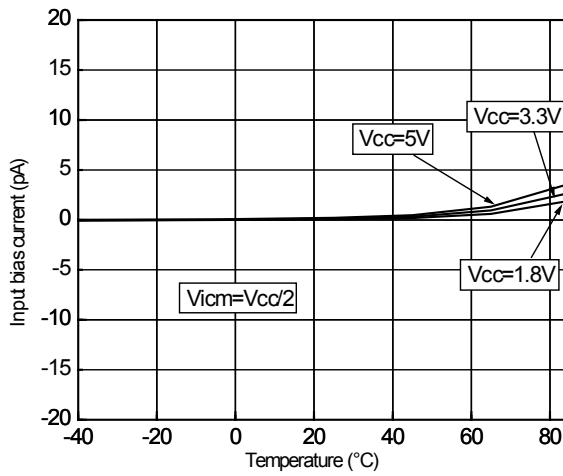


Figure 9. Output characteristics at 3.3 V supply voltage

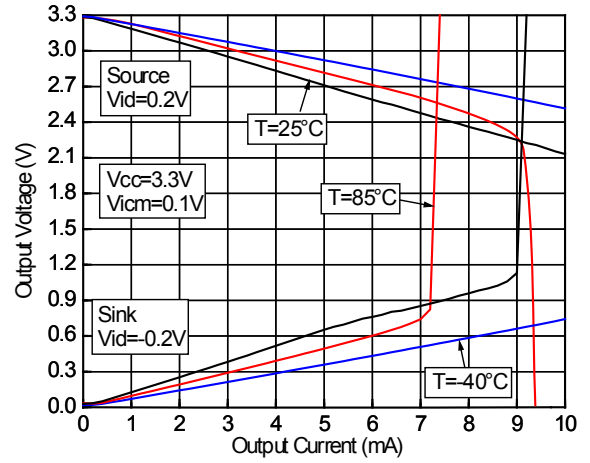


Figure 10. Desaturation time


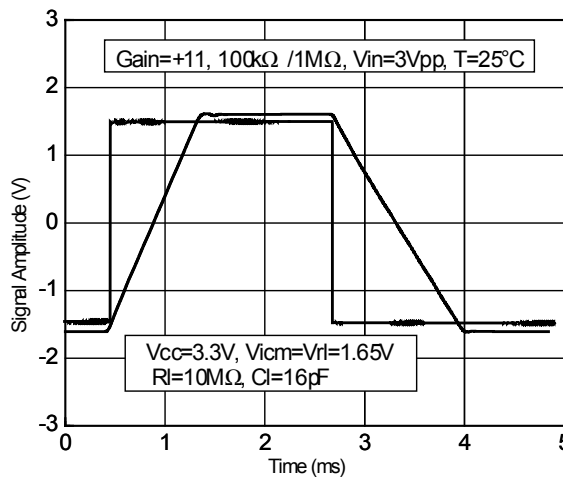


Figure 11. Phase reversal free

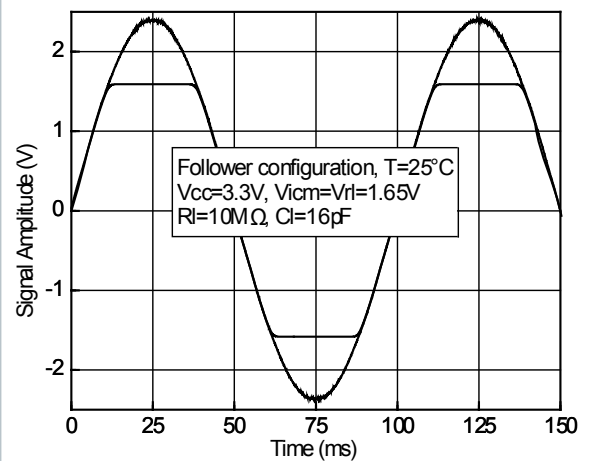

Prerelease product(s)



Figure 12. Slew rate vs. supply voltage

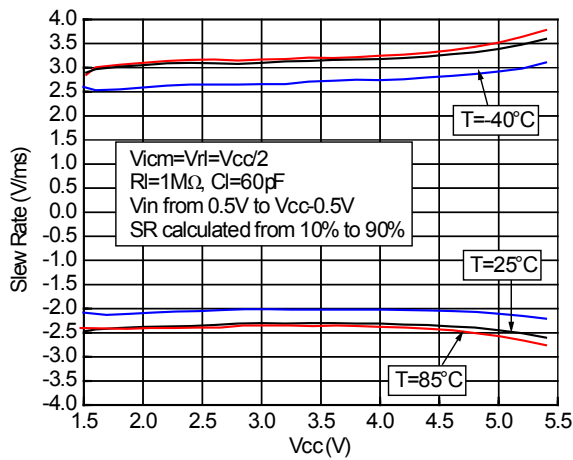


Figure 13. Output swing vs. input signal frequency

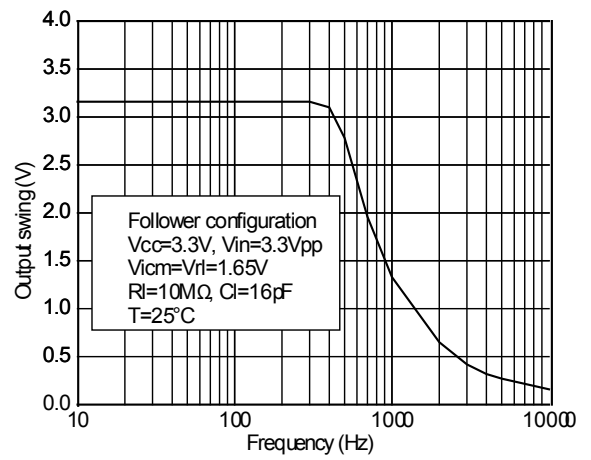


Figure 14. Small signal response at 3.3 V supply voltage

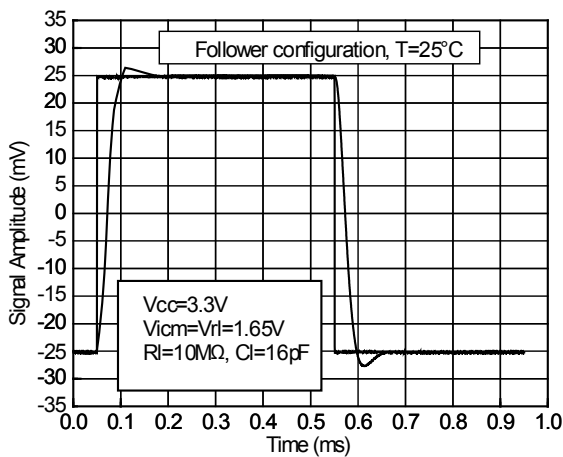


Figure 15. Large signal response at 3.3 V supply voltage

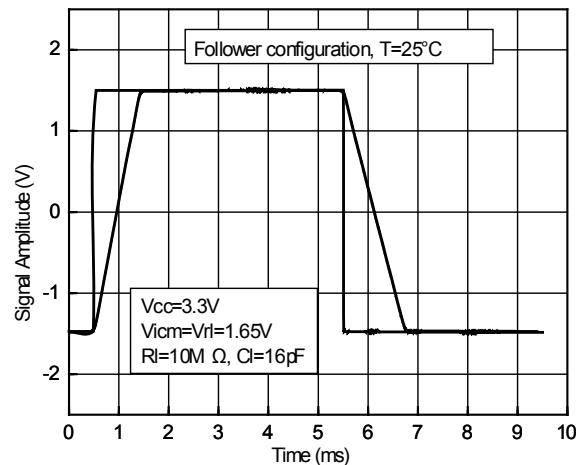


Figure 16. Bode diagram at 3.3 V supply voltage

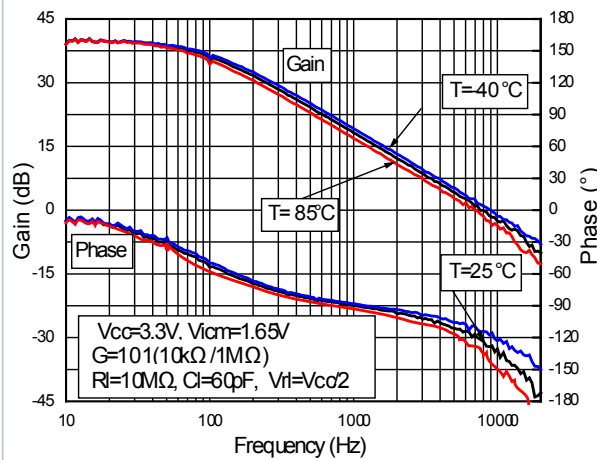


Figure 17. Noise at 3.3 V supply voltage in follower configuration


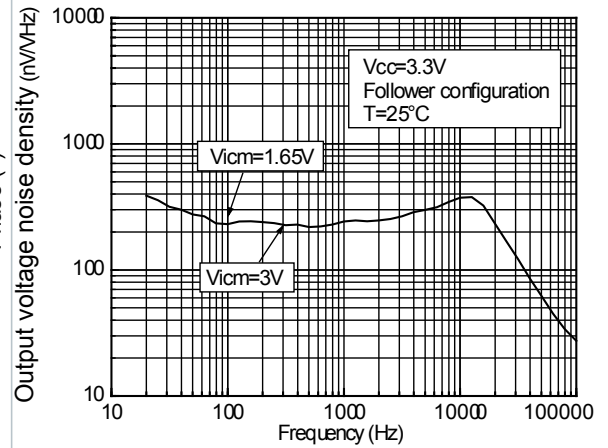


Figure 18.  $R_{iso}$  to drive capacitors above 100 pF in follower configuration

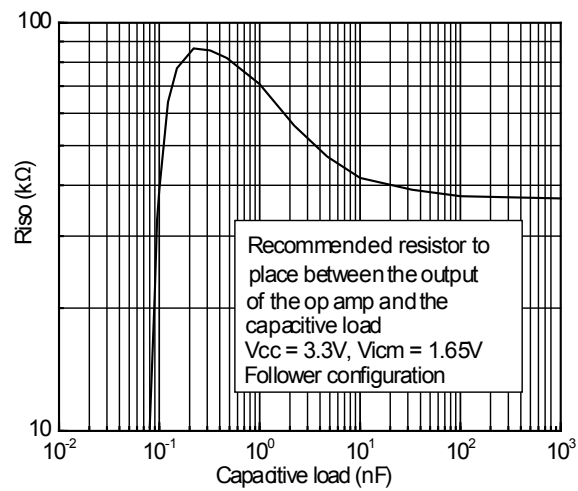


Prerelease product(s)

## 5 Package information

In order to meet environmental requirements, ST offers these devices in different grades of **ECOPACK** packages, depending on their level of environmental compliance. ECOPACK specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK is an ST trademark.

### 5.1 SC70-5 (or SOT323-5) package information

Figure 19. SC70-5 (or SOT323-5) package outline

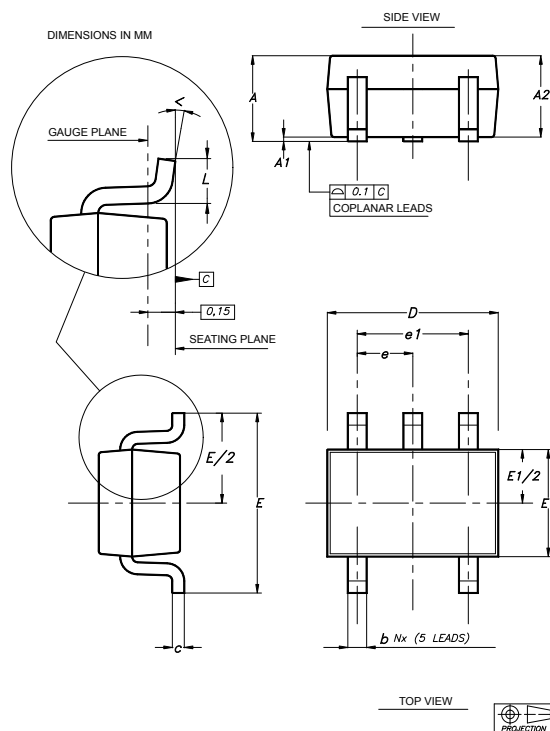

Prerelease product(s)

Table 7. SC70-5 (or SOT323-5) package mechanical data

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.80		1.10	0.032		0.043
A1			0.10			0.004
A2	0.80	0.90	1.00	0.032	0.035	0.039
b	0.15		0.30	0.006		0.012
c	0.10		0.22	0.004		0.009
D	1.80	2.00	2.20	0.071	0.079	0.087
E	1.80	2.10	2.40	0.071	0.083	0.094
E1	1.15	1.25	1.35	0.045	0.049	0.053
e		0.65			0.025	
e1		1.30			0.051	
L	0.26	0.36	0.46	0.010	0.014	0.018
<	0°		8°	0°		8°

## 5.2 SOT23-5 package information

Figure 20. SOT23-5 package outline

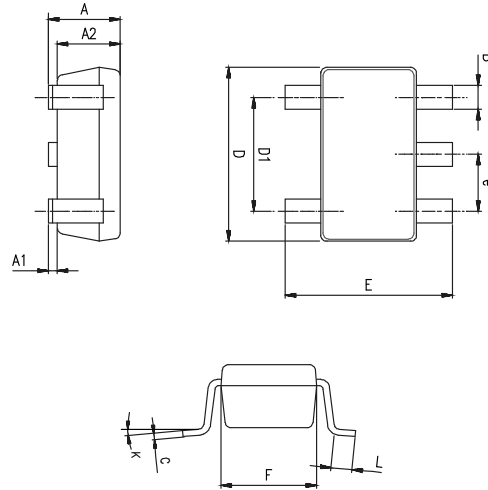


Table 8. SOT23-5 package mechanical data

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	0.90	1.20	1.45	0.035	0.047	0.057
A1			0.15			0.006
A2	0.90	1.05	1.30	0.035	0.041	0.051
B	0.35	0.40	0.50	0.014	0.016	0.020
C	0.09	0.15	0.20	0.004	0.006	0.020
D	2.80	2.90	3.00	0.110	0.114	0.118
D1		1.90			0.075	
e		0.95			0.037	
E	2.60	2.80	3.00	0.102	0.110	0.118
F	1.50	1.60	1.75	0.059	0.063	0.069
L	0.10	0.35	0.60	0.004	0.014	0.024
K	0°		10°	0°		10°

### 5.3 MiniSO8 package information

Figure 21. MiniSO8 package outline

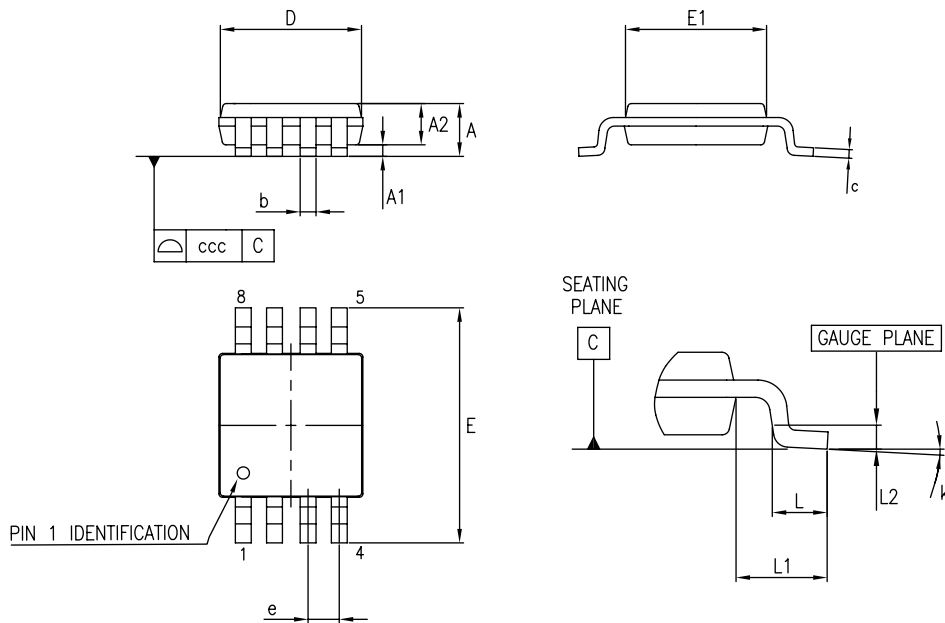


Table 9. MiniSO8 mechanical data

Dim.	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.1			0.043
A1	0		0.15	0		0.006
A2	0.75	0.85	0.95	0.03	0.033	0.037
b	0.22		0.4	0.009		0.016
c	0.08		0.23	0.003		0.009
D	2.8	3	3.2	0.11	0.118	0.126
E	4.65	4.9	5.15	0.183	0.193	0.203
E1	2.8	3	3.1	0.11	0.118	0.122
e		0.65			0.026	
L	0.4	0.6	0.8	0.016	0.024	0.031
L1		0.95			0.037	
L2		0.25			0.01	
k	0°		8°	0°		8°
ccc			0.1			0.004

## 5.4 TSSOP-14 package information

Figure 22. TSSOP-14 package outline

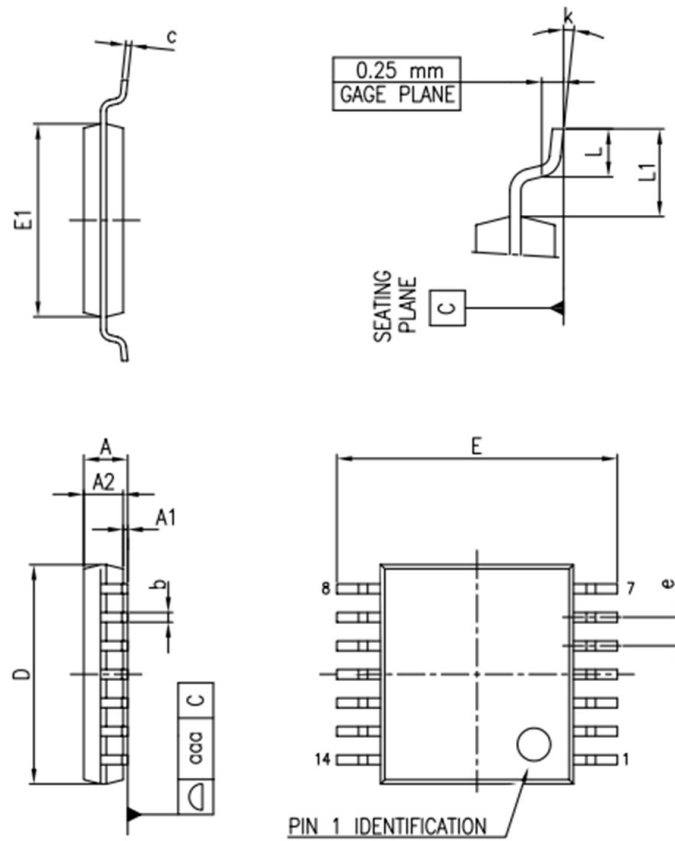


Table 10. TSSOP-14 mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A			1.20
A1	0.05		0.15
A2	0.80	1.00	1.05
b	0.19		0.30
c	0.09		0.20
D	4.90	5.00	5.10
E	6.20	6.40	6.60
E1	4.30	4.40	4.50
e	0.65 BSC		
L	0.45	0.60	0.75
L1		1.00	
k	0		8
aaa			0.10

## 6 Ordering information

Table 11. Order code

Order code	Temperature range	Package	Marking
TSL6801ICT	-40 °C to 85 °C	SC70-5	KF
TSL6801ILT		SOT23-5	KF
TSL6802IST		MiniSO8	KI
TSL6804IPT		TSSOP-14	6804I



## Revision history

Table 12. Document revision history

Date	Version	Changes
02-Dec-2021	1	Initial release.

## Contents

<b>1</b>	<b>Pin description</b> .....	<b>2</b>
1.1	TSL6801 single operational amplifier .....	2
1.2	TSL6802 dual operational amplifier .....	3
1.3	TSL6804 quad operational amplifier .....	4
<b>2</b>	<b>Absolute maximum ratings</b> .....	<b>5</b>
<b>3</b>	<b>Electrical characteristics</b> .....	<b>6</b>
<b>4</b>	<b>Typical performance characteristics</b> .....	<b>7</b>
<b>5</b>	<b>Package information</b> .....	<b>11</b>
5.1	[Package name] package information .....	11
5.2	SOT23-5 package information .....	13
5.3	MiniSO8 package information .....	14
5.4	TSSOP-14 package information .....	15
<b>6</b>	<b>Ordering information</b> .....	<b>16</b>
	<b>Revision history</b> .....	<b>17</b>

## List of tables

<b>Table 1.</b>	SC70-5 and SOT23-5 pin description . . . . .	2
<b>Table 2.</b>	MiniSO8 pin description . . . . .	3
<b>Table 3.</b>	TSSOP-14 pin description . . . . .	4
<b>Table 4.</b>	Absolute maximum ratings . . . . .	5
<b>Table 5.</b>	Operating conditions . . . . .	5
<b>Table 6.</b>	Electrical characteristics at $V_{CC} = 1.8\text{ V to }5.5\text{ V}$ , $V_{ICM} = V_{OUT} = V_{CC} / 2$ , $T = 25\text{ }^{\circ}\text{C}$ and OUT connected to $V_{CC} / 2$ through $R_L = 10\text{ k}\Omega$ (unless otherwise specified) . . . . .	6
<b>Table 7.</b>	SC70-5 (or SOT323-5) package mechanical data . . . . .	12
<b>Table 8.</b>	SOT23-5 package mechanical data . . . . .	13
<b>Table 9.</b>	MiniSO8 mechanical data . . . . .	14
<b>Table 10.</b>	TSSOP-14 mechanical data . . . . .	15
<b>Table 11.</b>	Order code . . . . .	16
<b>Table 12.</b>	Document revision history . . . . .	17

## List of figures

<b>Figure 1.</b>	SC70-5 and SOT23-5 pin connections (top view) . . . . .	2
<b>Figure 2.</b>	MiniSO8 pin connection (top view) . . . . .	3
<b>Figure 3.</b>	TSSOP-14 pin connections (top view) . . . . .	4
<b>Figure 4.</b>	Supply current vs. supply voltage . . . . .	7
<b>Figure 5.</b>	Input offset voltage distribution . . . . .	7
<b>Figure 6.</b>	Input offset voltage vs. common mode voltage . . . . .	7
<b>Figure 7.</b>	Input offset voltage temperature coefficient distribution . . . . .	7
<b>Figure 8.</b>	Input bias current vs. temperature . . . . .	8
<b>Figure 9.</b>	Output characteristics at 3.3 V supply voltage . . . . .	8
<b>Figure 10.</b>	Desaturation time . . . . .	8
<b>Figure 11.</b>	Phase reversal free . . . . .	8
<b>Figure 12.</b>	Slew rate vs. supply voltage . . . . .	9
<b>Figure 13.</b>	Output swing vs. input signal frequency . . . . .	9
<b>Figure 14.</b>	Small signal response at 3.3 V supply voltage . . . . .	9
<b>Figure 15.</b>	Large signal response at 3.3 V supply voltage . . . . .	9
<b>Figure 16.</b>	Bode diagram at 3.3 V supply voltage . . . . .	10
<b>Figure 17.</b>	Noise at 3.3 V supply voltage in follower configuration . . . . .	10
<b>Figure 18.</b>	$R_{iso}$ to drive capacitors above 100 pF in follower configuration . . . . .	10
<b>Figure 19.</b>	SC70-5 (or SOT323-5) package outline . . . . .	11
<b>Figure 20.</b>	SOT23-5 package outline . . . . .	13
<b>Figure 21.</b>	MiniSO8 package outline . . . . .	14
<b>Figure 22.</b>	TSSOP-14 package outline . . . . .	15

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. For additional information about ST trademarks, please refer to [www.st.com/trademarks](http://www.st.com/trademarks). All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2021 STMicroelectronics – All rights reserved