

General Purpose Transistors

NPN, 65 V, 100 mA

NST846MTWFT

The NST846MTWFT is designed for general purpose amplifier applications. It is housed in an ultra-compact DFN1010-3 with wettable flanks, recommended for the automotive industry's optical inspection methods. The transistor is ideal for low-power surface mount applications where board space and reliability are at a premium.

Features

- Wettable Flank Package for Optimal Automated Optical Inspection (AOI)
- NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb–Free, Halogen Free/BFR Free and are RoHS Compliant

MAXIMUM RATINGS $(T_A = 25^{\circ}C)$


Rating	Symbol	Max	Unit
Collector - Emitter Voltage	V_{CEO}	65	Vdc
Collector - Base Voltage	V_{CBO}	80	Vdc
Emitter – Base Voltage	V_{EBO}	5.0	Vdc
Collector Current – Continuous	Ic	100	mA
Collector Current – Peak	I _{CM}	200	mA


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance Junction-to-Ambient (Note 1)	$R_{\theta JA}$	220	°C/W
Total Power Dissipation per Device @T _A = 25°C (Note 1)	P _D	570	mW
Junction and Storage Temperature Range	T _J , T _{stg}	-65 to +150	°C

1. Per JESD51-7 with standard PCB footprint and 2 oz. Cu.





46 = Specific Device Code M = Month Code

ORDERING INFORMATION

Device	Package	Shipping [†]
NST846MTWFTBG	XDFNW3 (Pb-Free)	3000 / Tape & Reel
NSVT846MTWFTBG	XDFNW3 (Pb-Free)	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

ELECTRICAL CHARACTERISTICS ($T_A = 25^{\circ}C$ unless otherwise noted)

Characteristic		Min	Тур	Max	Unit
OFF CHARACTERISTICS	•	•	•	•	•
Collector - Emitter Breakdown Voltage (I _C = 10 mA)	V _{(BR)CEO}	65	_	_	V
Collector – Emitter Breakdown Voltage (I _C = 10 μA, V _{EB} = 0)	V _{(BR)CES}	80	-	-	V
Collector – Base Breakdown Voltage (I _C = 10 μA)	V _{(BR)CBO}	80	_	-	V
Emitter – Base Breakdown Voltage ($I_E = 0.1 \mu A, I_C = 0$)	V _{(BR)EBO}	6.0	_	-	V
Collector Cutoff Current $(V_{CB} = 30 \text{ V})$ $(V_{CB} = 30 \text{ V}, T_A = 150^{\circ}\text{C})$	I _{CBO}	- -	- -	15.0 5.0	nA μA
Emitter – Base Cutoff Current (V _{BE} = 6 V, I _C = 0)	I _{EBO}	_	_	0.1	μΑ
ON CHARACTERISTICS	•	•	•		
DC Current Gain (Note 2) $ (I_C = 10 \ \mu\text{A}, \ V_{CE} = 5.0 \ \text{V}) $ ($I_C = 2.0 \ \text{mA}, \ V_{CE} = 5.0 \ \text{V}) $	h _{FE}	- 220	150 290	- 450	
Collector – Emitter Saturation Voltage (Note 2) (I_C = 10 mA, I_B = 0.5 mA) (I_C = 100 mA, I_B = 5.0 mA)	V _{CE(sat)}	- -	- -	0.25 0.60	V
Base – Emitter Saturation Voltage (Note 2) (I_C = 10 mA, I_B = 0.5 mA) (I_C = 100 mA, I_B = 5.0 mA)	V _{BE(sat)}	- -	0.7 0.9	- -	V
Base – Emitter Turn–on Voltage (Note 2) (I_C = 2.0 mA, V_{CE} = 5.0 V) (I_C = 10 mA, V_{CE} = 5.0 V)	V _{BE(on)}	0.6 -	- -	0.75 0.82	V
SMALL-SIGNAL CHARACTERISTICS					
Transition Frequency ($I_C = 10 \text{ mA}$, $V_{CE} = 5.0 \text{ V}$, $f = 100 \text{ MHz}$)	f _T	100	_	_	MHz
Output Capacitance (V _{CB} = 10 V, f = 1.0 MHz)	C _{obo}	-	1.0	3.0	pF
Noise Figure (I _C = 0.2 mA, V_{CE} = 5.0 Vdc, R_S = 2.0 k Ω , f = 1.0 kHz, BW = 200 Hz)	NF	-	1.0	-	dB

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

^{2.} Pulse Condition: Pulse Width = 300 $\mu s,$ Duty Cycle \leq 2%.

TYPICAL CHARACTERISTICS




Figure 1. DC Current Gain




Figure 2. DC Current Gain




Figure 3. Collector Current as a Function of Collector Emitter Voltage




Figure 4. Collector-Emitter Saturation Voltage




Figure 5. Collector-Emitter Saturation Voltage





Figure 6. Collector-Emitter Saturation Voltage

TYPICAL CHARACTERISTICS

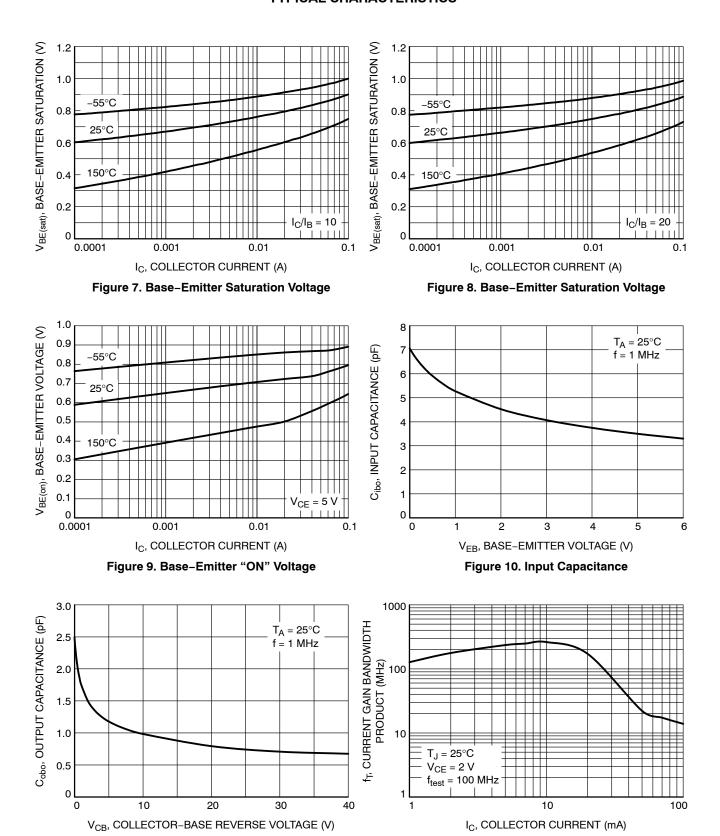

www.onsemi.com

Figure 11. Output Capacitance

Figure 12. f_T, Current Gain Bandwidth Product

TYPICAL CHARACTERISTICS

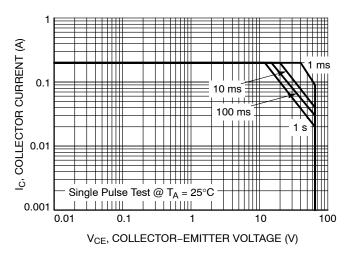


Figure 13. Safe Operating Area

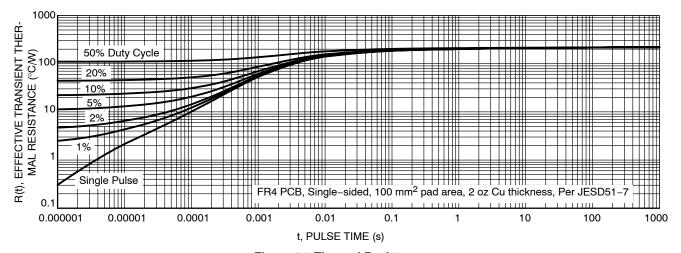


Figure 14. Thermal Resistance


TOP VIEW

PIN 1 REFERENCE

> Detail A // 0.05 C

XDFNW3 1x1, 0.65P CASE 521AC **ISSUE A**

DATE 30 OCT 2019




Detail B


C SEATING PLANE

- 1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
- 2. CONTROLLING DIMENSION: MILLIMETERS

MILLIMETERS

	WILLIWILTERS		
DIM	MIN.	NOM.	MAX.
Α	0.32	0.38	0.44
A1	0.00		0.04
А3	0.125 REF		
b	0.20	0.25	0.30
D	0.90	1.00	1.10
D1	0.00		0.04
D2	0.75	0.80	0.85
E	0.90	1.00	1.10
E2	0.40	0.45	0.50
е	0.65 BSC		
L	0.465	0.515	0.565

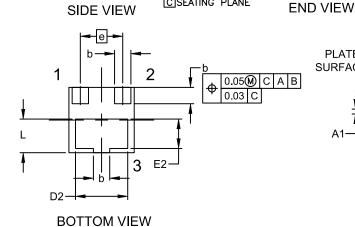




- 0.90 **-**

0.68

PITCH



RECOMMENDED MOUNTING FOOTPRINT*

XXM	
0	

GENERIC

MARKING DIAGRAM*

XX = Specific Device Code = Month Code М

*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98AON11341H	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	XDFNW3 1x1, 0.65P		PAGE 1 OF 1	

ON Semiconductor and un are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales